

Optima® Sensor Faucet

EAF-225-PLG-ISM-CP-0.5GPM-AER-IQ-FCT

Product description

Plug Adapter Power Supply, Integrated Side Mixer, Polished Chrome Finish, 0.5 gpm, Aerated Spray, Infrared Sensor, Optima® Hardwired-Powered Deck-Mounted Mid Body Faucet.

Compliances & Certifications

ASME NYC604.4

(ADA Compliant*, ASME A112.18.1 Compliant, CEC Compliant, EPD, GPC 0.25 or less, HPD, IAPMO, NSF-61/CAN-61, NYC604.4, TAS, cUPC Certified, WELL Building Standard)

Code 3335075

Finish

Polished Chrome (CP)

Downloads

- EAF 200_225_250_275 Installation Instructions.pdf
- EAF 200_225_250_275 (SP) Installation Instructions.pdf
- Faucet Spray Heads Maintenance Guide.pdf
- Faucet and Soap Dispenser Brochure.pdf
- Additional Downloads

Videos

- Sloan Connect App®

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Details

- Flow Rate: 0.5 gpm (1.9 Lpm) (0.5GPM)
- Spray Type: Aerated (AER)
- Sensor Type: Infrared
- Mounting Type: Single Hole
- Power Supply: Plug Adapter (PLG)
- Temperature Mixer: Integrated Side Mixer (ISM)
- Finish: Polished Chrome (CP)
- Factory Default Timeout: 30s
- Factory Default GPC: 0.25 gpc

Features

Commercial Grade, ADA Compliant, Electronic, Sensor-Activated, Die-Cast Metal Hand Washing Faucet with the following features:

- Standby mode (option) permits light ring to remain illuminated with dim white light
- Soft-off function of indicator light. Light is turned off softly after the water flow stops
- Hot adjustable water limit set point
- Modular One-piece Construction with all Concealed Components above deck
- Double Infrared Sensors with Automatic Setting Feature and Microprocessor
- Magnetic Solenoid Valve
- Water temperature revealed by Illuminated Temperature Indication Ring
- Water temperature can be user adjusted
- Security-off after 1 minute of continuous water flow (vandal-resistant construction)
- Water Supply Connection with Flexible High-pressure Hose and Strainer
- Appropriate Mounting Hardware included
- 3 year limited warranty
- Chrome plated finish
- 0.5GPM sprayhead with aerated flow pattern
- Includes 120V plug-in transformer
- Integrated Side Mixer (ISM) included in spout for temperature setting and adjustment. Also includes cap to cover handle if removed.
-

Electrical specifications

- Sensor Range: 4”-5” (102-127 mm)
- Timeout Adjustment Setting: 30 Seconds

Warranty

View Warranty Information


Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Looking for other variations of the EAF-225 product? View the general spec sheet with all options.
Find a matching soap dispenser for this faucet.
Find a compatible sink for this faucet


EAF-225-ISM, EAF-225-ISM-IC AND
EAF-225-ISM-DPU-IC
Faucets with Hot and Cold Water Supply

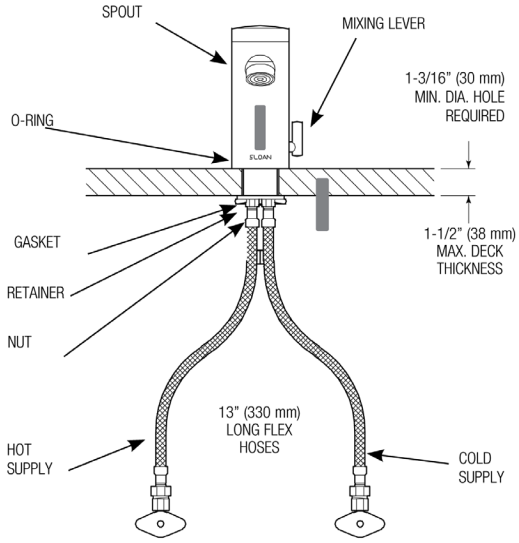

When the EAF faucet is installed on a sink that has three (3) hole punchings, a Trim Plate should be used. Trim Plates must be specified and ordered separately:

ETF-312-A
Trim Plate for 4" (102 mm) Centerset Sink

ETF-510-A
Trim Plate for 8" (204 mm) Centerset Sink

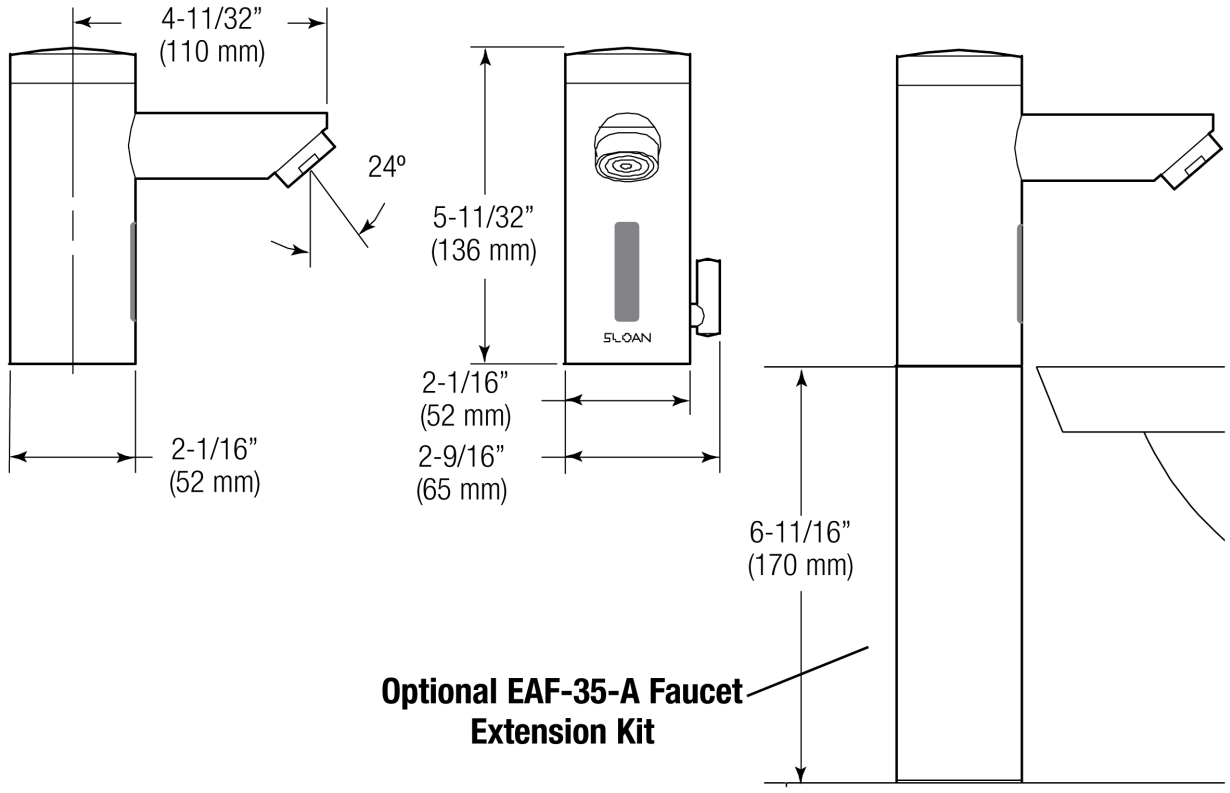

Optional EAF-35-A Faucet Extension Kit