



Urinal & Flushometer Combo

WEUS-1006.1304-1.0-CP-TMO-HW-24V

Product description

1.0 gpf, Polished Chrome Finish, Fixture Connection Top Spud, Single Flush, 3/4" Control Stop, True Mechanical Override, Hardwired, Sensor-Operated, 24V, SU-1009 Urinal and ROYAL 186 ESS Flushometer.

Compliances & Certifications



(ADA Compliant*, EPD, HPD, IAPMO, cUPC Certified, WELL Building Standard)

Code 10061304

Downloads

- [Standard Spud Urinal Installation Instructions.pdf](#)
- [Royal ESS TMO Installation Instructions.pdf](#)
- [SS:ST:SU:WETS:WEUS Fixtures Repair and Maintenance Guide.pdf](#)
- [Optima ESS TMO Concealed Repair and Maintenance Guide.pdf](#)
- [Fixture Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan – Company Overview](#)

Details

- Flush Volume: 1.0 gpf (3.8 lpf)

Features

- Complete urinal system including Royal flushometer Designed to maximize performance
- Thorough washdown flushing action
- Durable, hygienic vitreous china construction
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly

Components

- Flushometer: Code 3452640
- Urinal: Code 1101009



Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

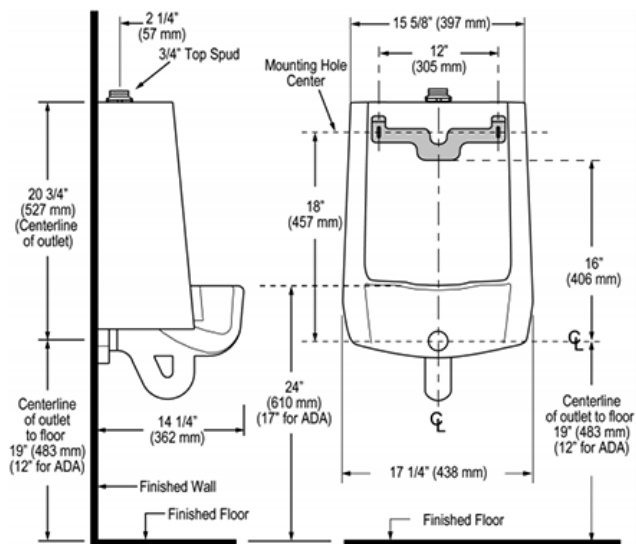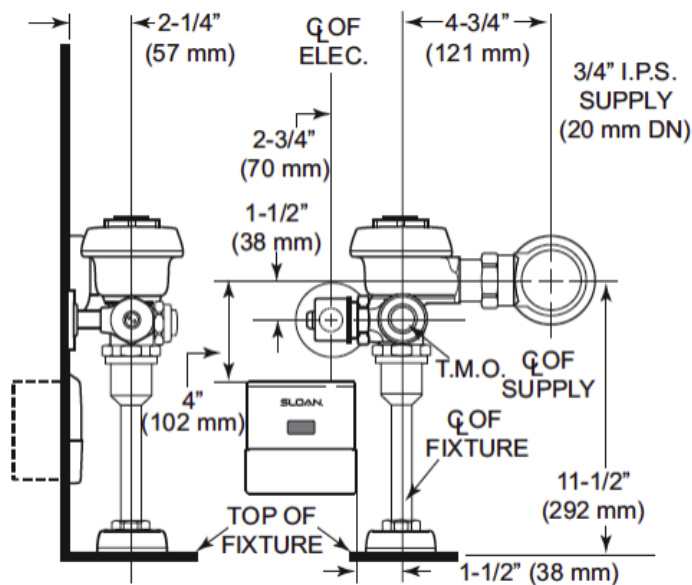

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.