



Variation not shown: Trap Primer

Sloan® Sensor Flushometer

SLOAN 111 SMO-1.28-CP-TP

Product description

1.28 gpf, Polished Chrome Finish, 1.5" Flush Connection, Fixture Connection Top Spud, Single Flush, 1" Inlet, 1" Control Stop, Trap Primer Outlet Tube, Electrical Override, Battery, Infrared, Sloan® Exposed Sensor Water Closet Flushometer.

Compliances & Certifications



(BREEAM Water Credit, Green Globes Water, Satisfies LEED Credits)

Code 3780065

Finish


 Polished Chrome (CP)

Downloads

- [Sloan Exposed Installation Instructions.pdf](#)
- [Sloan Exposed \(Spanish\) Installation Instructions.pdf](#)
- [Optima SMO Installation Instructions.pdf](#)
- [Control Stop Repair and Maintenance Guide.pdf](#)
- [Flush Connections Flanges Repair and Maintenance Guide.pdf](#)
- [Flushometers Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

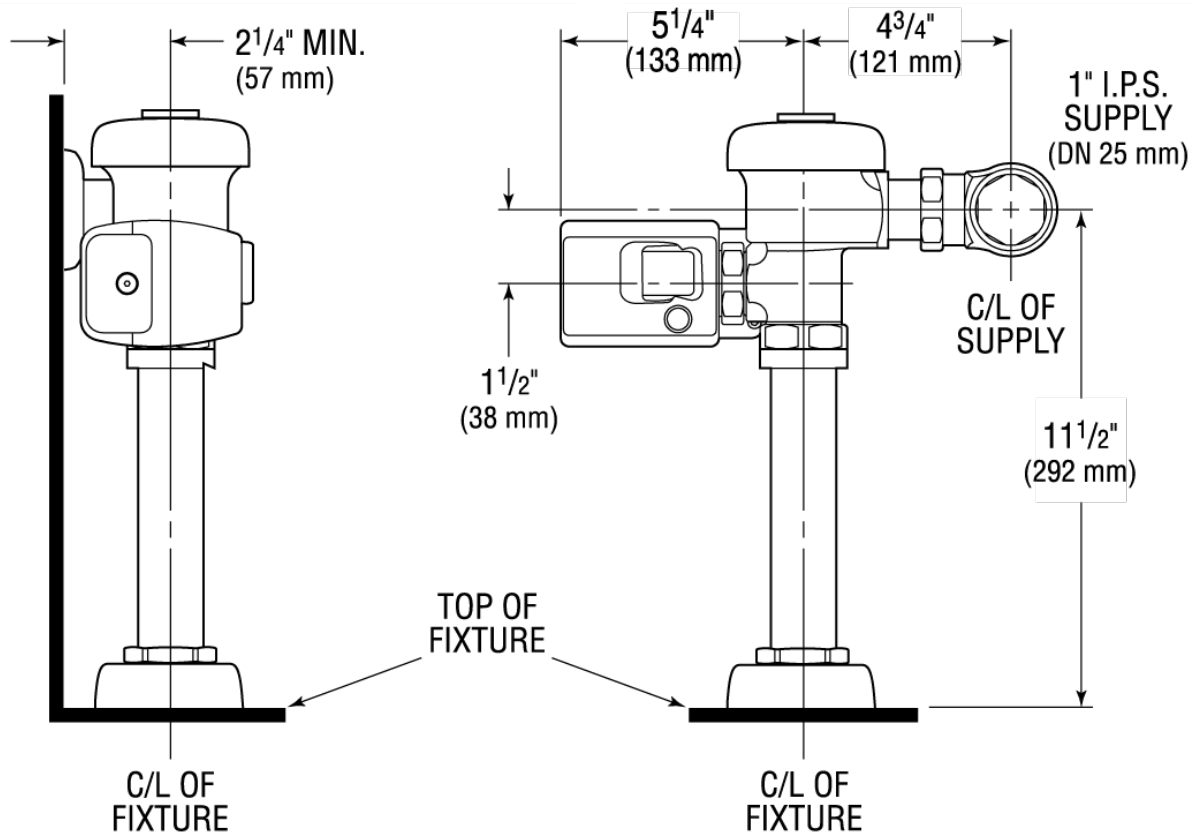

- Flush volumes start as low as 1.6 gpf/6.0 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents toilet from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece to accommodate different height requirements
- High chloramine resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

[view the general spec sheet with all options.](#)

[Find a compatible urinal](#) for this flushometer.

[Find a compatible water closet](#) for this flushometer.

Rough-in and line drawing