



Urinal & Flushometer Combo

WEUS-7000.1406

Product description

Standard, SU-7009 Urinal and ROYAL 186 SFSM Flushometer.

Compliances & Certifications



(ADA Compliant*, BREEAM Water Credit, EPD, Green Globes Water, HPD, IAPMO, LBC Credit, LEED Water, Satisfies LEED Credits, EPA WaterSense Listed, WELL Building Standard)

Code 70001406

Downloads

- [↗ Royal Exposed Installation Instructions.pdf](#)
- [↗ EBV-500_550-A Installation Instructions.pdf](#)
- [↗ EBV500-EBV550 Repair and Maintenance Guide.pdf](#)
- [↗ Royal Manual Diaphragm Flushometer Repair and Maintenance Guide.pdf](#)
- [↗ Retrofits Brochure.pdf](#)
- [↗ Additional Downloads](#)

Videos

- [▶ Sloan - Company Overview](#)

Details

- Flush Volume: 0.125 gpf (0.5 lpf)

Features

- Includes the required wall plate and a purple wall flange to let users know reclaimed water is in use
- All organic rubber has been replaced with synthetic compounds
- Optional purple handle provides additional indication of reclaimed water use
- Critical components, including cover, valve body, control stop and sweat solder kit, are made of semi-red brass
- PERMEX® Synthetic Rubber Diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- Designed to maximize and complement Sloan flushometers
- Small size and clean lines fits a large variety of applications and restroom looks
- Thorough washdown flushing action
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Water Sense listed by EPA that qualifies for most rebate programs
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly

Components


- Flushometer: Code 3912748
- Urinal: Code 1107009

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.@AttributePlain:*Compliant with ADA accessibility requirements when installed according to ADA standards.

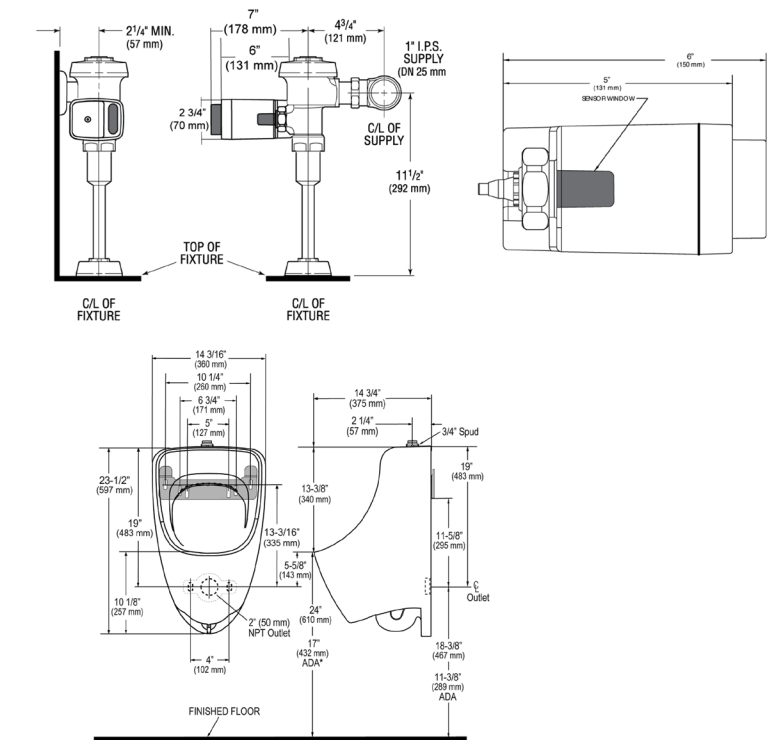

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/4" rim height or less to ensure compliance.