PWT™ Accessory

MCR-176

Product description

Infrared Sensor-activated Electronic Shower Control.

Compliances & Certifications

(BAA Compliant, NOM Certified)

Code 3375013

Downloads

- Programmed Water Technologies (PWT) Brochure.pdf
- Additional Downloads

Videos

- Sloan – Company Overview

WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Features

- System includes five components: ETF-492-A EL-154, MCR-139-A, ETF-458-A and EL-462-A
- Infrared, sensor-activated shower control for single, pre-mixed shower
- Water run-times and sensor range are adjustable
- Control module may be located remotely as far as 35 feet from sensor using additional PWT extension cord kits
- Waterproof, NEMA 6-compliant sensor module
- Diagnostic LED indicators in control module
- May be paired with Sloan Act-O-Matic Standard or Institutional style showerheads
- Accessories:
- ETF-1003-72 6’ Single Wire Extension Cord Kit (order separately)
- ETF-1003-108 9’ Single Wire Extension Cord Kit (order separately)
- ETF-1003-240 20’ Single Wire Extension Cord Kit (order separately)
- ETF-1003-600 50’ Single Wire Extension Cord Kit (order separately)
- Visible LED target detection
- Infrared sensor module, controller, solenoid, 120 VAC/24 VAC transformer, 20’ power cord kit and mounting hardware for sensor and controller
- Operates on 24 V AC
- Adjustable sensing range
- Adjustable run time
- 24 VAC brass body solenoid with integral “Y” strainer
- Control module may be located remotely as far as 35’ from sensor using additional MICRO Plumb® extension cord kits
- RJ-11 modular connections from sensor and solenoid to controller

Warranty

View Warranty Information

Notes

All information contained within this document subject to change without notice.

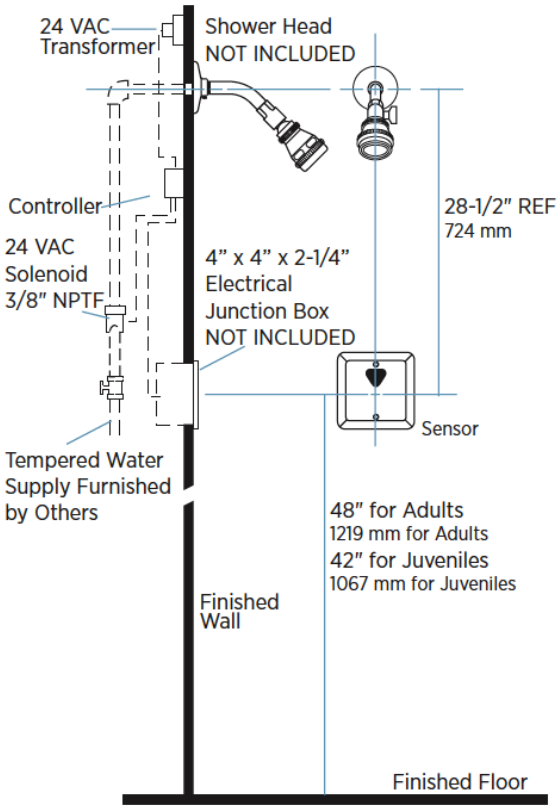
24 VAC
Transformer
Shower Head
NOT INCLUDED
Controller
24 VAC
Solenoid
3/8" NPTF
4" x 4" x 2-1/4"
Electrical
Junction Box
NOT INCLUDED
28-1/2" REF
724 mm
Sensor
Tempered Water
Supply Furnished
by Others
48" for Adults
1219 mm for Adults
42" for Juveniles
1067 mm for Juveniles
Finished
Wall
Finished Floor