



Water Closet & Flushometer Combo

WETS-2449.1200

Product description

Standard, ST-2449 Water Closet and SOLIS 8111 Flushometer.

Compliances & Certifications



(ADA Compliant*, BAA Compliant, BABAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, EPD, Green Globes Credit, Green Globes Water, HPD, IAPMO, LEED Credit, LEED HPD, LEED Water, Satisfies LEED Credits, cUPC Certified, EPA WaterSense Listed, WELL Building Standard)

Code 24491200

Downloads

- [HET Top Spud Installation Instructions.pdf](#)
- [G2 and ECOS Single Flush Optima Plus Valve Installation Instructions duplicate.pdf](#)
- [SS:ST:SU:WETS:WEUS Fixtures Repair and Maintenance Guide.pdf](#)
- [Fixture Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan - Company Overview](#)

Details

- Flush Volume: 1.1 gpf (4.2 lpf)

Features

- Handle Packing, Main Seat, Stop Seat and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine resistance
- User friendly three (3) second Flush Delay
- “Low Battery” Flashing LED
- Sweat solder adapter with cover tube and cast wall flange with set screw
- State-of-the-art photovoltaic technology delivers solar operation
- Solar Powered- The sensor assembly is powered by a solar cell that will harvest power from the artificial indoor light (incandescent, fluorescent or LED), and use it as the energy source. The solar cell can provide approximately 100% power with 650 illuminance (lux).
- Four (4) Size AA Battery Back-up Power Source
- Operates by means of an infrared sensor with multiple-focused, lobular sensing fields for high and low target detection
- Fixed Metering Bypass and No External Volume Adjustment to Ensure Water Conservation
- Flex Tube Diaphragm designed for improved life and reduced maintenance
- Designed to maximize and complement Sloan flushometers
- Universal model works with Sloan flushometers from 1.1 to 1.6 gpf
- Durable, hygienic vitreous china construction with elongated rim
- Syphon jet flushing achieves 1000g Map Scores when used with Sloan flushometers
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Compliant to TAS (Texas Accessibility Standards) and ADA Standards for Juveniles

Components

- Flushometer: Code 3370085
- Water Closet: Code 2102449

Warranty


[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.

Static load tested according to the procedure outlined in Section 6.7 of ASME A112.19.2. Not recommended for bariatric use.

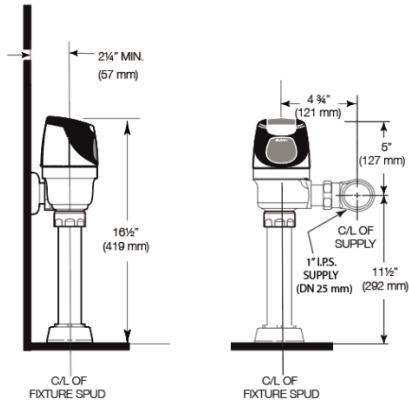

WHEN INSTALLING IN A HANDICAP STALL:
Per the ADA Guidelines (section 604.9.4)
it is recommended that the grab bars be
split or shifted to the wide side of the stall.
If grab bars must be present over the valve,
use the alternate ADA installation as shown
to the right.

