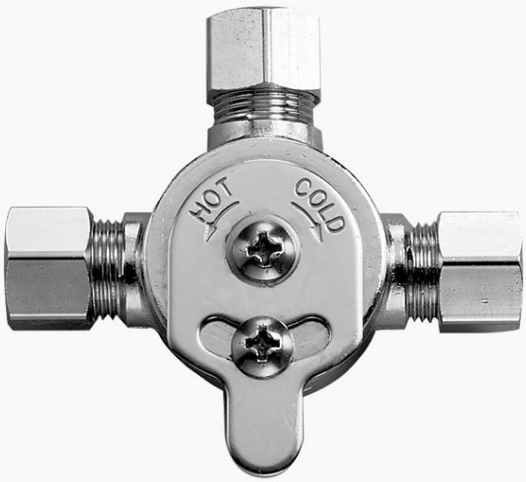


Optima® Accessory

MIX-60-A

Product description

Below Deck Manual Mixing Valve.

Compliances & Certifications

(IAPMO, UPC Low Lead Certified)

Code 3326009

Downloads

Additional Downloads

Videos

Sloan – Company Overview

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Features

MIX-60-A Below Deck Mechanical Water Mixing Valve with the following features:

- Designed to install under the lavatory
- Supplied with Sloan Optima and Optima Plus faucets that are specified with the “BDM” (Below-Deck-Mixer) variation
- Installs in place of the Tee fitting supplied with the faucet prior to the solenoid valve
- Equipped with integral check valves at inlets
- 3/8” compression fittings on inlets and outlet
- Compression sleeves and nuts included
- Lever dial adjustment with lock screw: COLD-HOT
- Brass construction
- Chrome plated finish

Warranty

View Warranty Information

Notes

All information contained within this document subject to change without notice.

Flow Capacities

SYSTEM PRESSURE						
PSI	20	30	40	50	60	70
BAR	1.4	2.1	2.8	3.4	4.2	4.9
GPM	1.75	2.25	2.75	3.0	3.5	4.0
Lpm	6.62	8.51	10.40	11.35	13.25	15.14

CAUTION! This is a mechanical hot and cold mixing valve only! It **DOES NOT** provide automatic control of water temperature. Hot water in excess of 110°F (43°C) is dangerous and **CAN CAUSE SCALDING!**

