**Stainless Steel Sink**

# ESS-3200

## Product description

Stainless Steel 2-Station Deluxe Scrub Sink.

## Compliances & Certifications

(BAA Compliant, BABAA Compliant, cUPC Certified)

### Code ESS-3200

### Downloads

- Optima ESS-2000_3000 Series Installation Instructions.pdf
- Optima ESS-2000_3000 Series (Spanish) Installation Instructions.pdf
- EHS-1000-ESS-2000-3000 Series Repair and Maintenance Guide.pdf
- Sinks - Full Line Brochure.pdf
- Additional Downloads

### Videos

- Sloan – Company Overview



WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

## Details

- Material:
  - Stainless Steel
- Enclosure Type: Stainless Solid
- Mounting: Wall-Mounted
- Width: 64” (1626mm)

## Features

Deluxe Double Station Stainless Steel Scrub Sink with Sensor Activated, 24 VAC, Chrome Plated Brass Hand Washing Faucets with the following features:

- Sink constructed from 14 gauge, Type 304 stainless steel with bead blast finish on sink bowl interior for superior wash-down characteristics
- Sloan OPTIMA Faucet for hands-free operation
- Knee activated soap dispenser for hands-free operation
- Sink is shipped pre-plumbed for easy installation
- 18 gauge “lift-out” style front access panel for easy maintenance access

## Recommended specifications

Sloan Stainless Series Scrub Sink model no. ESS 3200-C-ADM (code no. 3850215). Product to be made of 14 gauge type 304 stainless steel with 2 Sloan ESF-40-S-P sensor faucets. 2 mixing valves supplied. Sink design to be ADA compliant.

## Suggested Faucets

## Warranty

View Warranty Information

## Notes

All information contained within this document subject to change without notice.

Find a compatible faucet for this sink.
Find a matching soap dispenser for this sink.

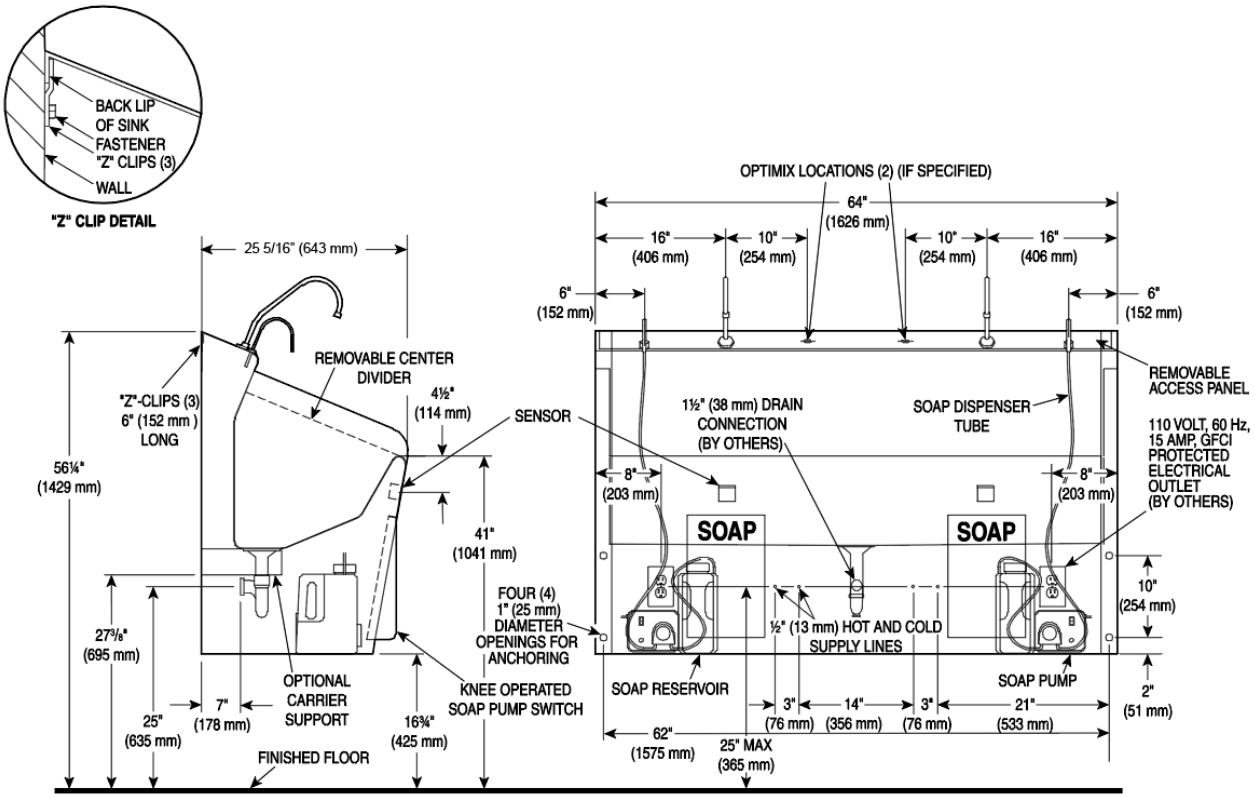
BACK LIP OF SINK
FASTENER
"Z" CLIPS (3)
WALL
"Z" CLIP DETAIL
25 5/16" (643 mm)
REMOVABLE CENTER DIVIDER
"Z"-CLIPS (3) 6" (152 mm ) LONG
4½" (114 mm)
SENSOR
56¼" (1429 mm)
41" (1041 mm)
27⅜" (695 mm)
25" (635 mm)
7" (178 mm)
OPTIONAL CARRIER SUPPORT
16¾" (425 mm)
KNEE OPERATED SOAP PUMP SWITCH
FINISHED FLOOR
OPTIMIX LOCATIONS (2) (IF SPECIFIED)
64" (1626 mm)
16" (406 mm)
10" (254 mm)
10" (254 mm)
16" (406 mm)
6" (152 mm)
6" (152 mm)
REMOVABLE ACCESS PANEL
1½" (38 mm) DRAIN CONNECTION (BY OTHERS)
SOAP DISPENSER TUBE
110 VOLT, 60 Hz, 15 AMP, GFCI PROTECTED ELECTRICAL OUTLET (BY OTHERS)
8" (203 mm)
8" (203 mm)
SOAP
SOAP
FOUR (4) 1" (25 mm) DIAMETER OPENINGS FOR ANCHORING
½" (13 mm) HOT AND COLD SUPPLY LINES
10" (254 mm)
SOAP RESERVOIR
SOAP PUMP
2" (51 mm)
3" (76 mm)
14" (356 mm)
3" (76 mm)
21" (533 mm)
62" (1575 mm)
25" MAX (365 mm)