




Sloan® Sensor Flushometer

SLOAN 8111 MC

Product description

Sloan® Exposed Sensor Water Closet Flushometer.

Compliances & Certifications

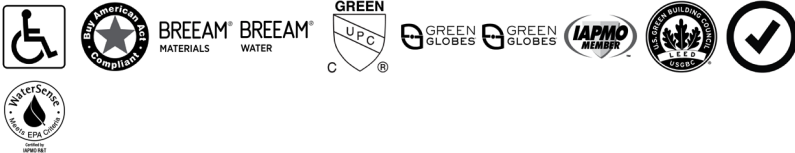

(ADA Compliant*, BAA Compliant, BREEAM Materials Credit, BREEAM Water Credit, Green Globes Credit, Green Globes Water, IAPMO, LEED Water, Satisfies LEED Credits, EPA WaterSense Listed)

Listed compliances and certifications may vary based on product variation.

Finish



Available in Polished Chrome (CP).

Downloads

- [G2 and ECOS Single Flush Optima Plus Valve Installation Instructions](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Additional Downloads](#)

Videos

- [Sloan – Company Overview](#)

Features

- Chrome plated all-metal zinc die cast sensor housing with tempered glass window and no visible fasteners
- High chloramine resistant PERMEXsynthetic rubber diaphragm with DFB
- Valve body, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037
- ADA-compliant flushometer automatically operates by means of a infrared sensor with multiple-focused, lobular sensing fields for high and low target detection
- Fixed metering bypass and no external volume adjustment to ensure water conservation
- Adjustable tailpiece to accommodate different horizontal requirements
- High copper, low zinc brass castings for dezincification resistance
- Available in low consumption (1.6 gpf/6.0 Lpf) and high efficiency (1.28 gpf/4.8 Lpf) models

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.