

OPTIONS

Flush Volume

- 1.0 gpf (3.8 Lpf) (1.0)
- 1.5 gpf (5.7 Lpf) (1.5)
- 3.5 gpf (13.2 Lpf) (3.5)

Water Efficiency

- Water Saver
- Low Consumption

L Dimension

- 2" - 10 ¾" (51 - 273mm)
- 11" - 12 ¾" (279 - 324mm)
- 11" - 14 ¾" (279 - 375mm)
- 13" - 19 ¾" (330 - 502mm)

Override

- Less (L/OR)
- Electrical

Wall Box

- With (W/BOX)


Compliances & Certifications

- ADA Compliant
- BAA Compliant
- BABAA Compliant
- UL Certified
- UPC Certified
- cUPC Certified

NOTES

For product line drawings, [view model-specific spec sheets](#).

All information contained within this document subject to change without notice.

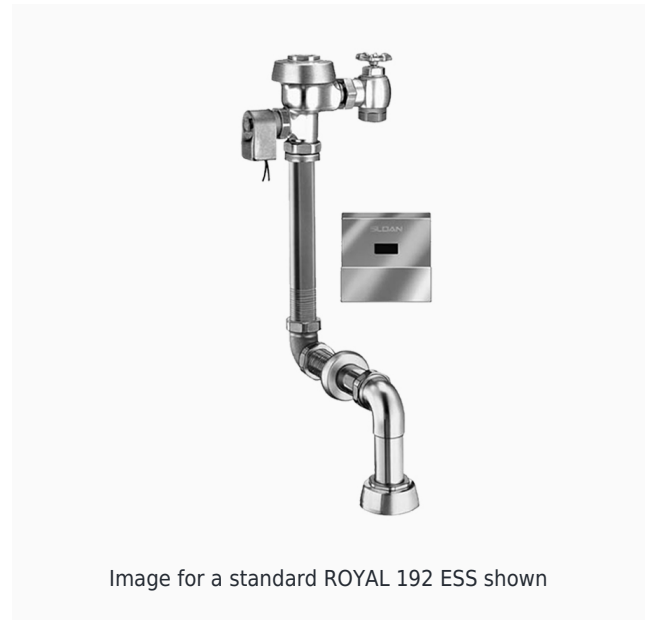

DESCRIPTION

Royal® Concealed Sensor Hardwired Urinal Flushometer

FEATURES

- Flush volumes start as low as a pint of water
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which, prevents urinal from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece
- PERMEX synthetic rubber diaphragm with Dual Filtered Fixed Bypass
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037.

DOWNLOADS

- [Royal ESS Concealed and Exposed Installation Instructions](#)
- [Royal ESS Concealed with Wall Box Installation Instructions](#)
- [Control Stop Repair and Maintenance Guide](#)
- [Flush Connections Flanges Repair and Maintenance Guide](#)
- [Tail Piece Repair and Maintenance Guide](#)
- [Optima ESS Repair and Maintenance Guide](#)
- [Additional Downloads](#)

VIDEOS

- ▶ [ESS Flushometer](#)

Sloan 10500 Seymour Ave, Franklin Park, IL 60131

Phone: 800.982.5839 • Fax: 800.447.8329 • sloan.com