



Urinal & Flushometer Combo

WEUS-7000.1015

Product description

Standard, SU-7009 Urinal and REGAL 186 Flushometer.

Compliances & Certifications



(ADA Compliant, ASSE 1001, ASSE 1001 Green, BREEAM Materials Credit, BREEAM Water Credit, CalGreen Compliant, CEC Compliant, cUPC Certified, cUPC Green Certified, cUPC Green Certified, EPD, Green Globes Credit, Green Globes Water, HPD, IAPMO, LEED Credit, LEED HPD, LEED Water, Satisfies LEED Credits, EPA WaterSense Listed, WELL Building Standard)

Code 70001015

Downloads

- [Regal XL Exposed Installation Instructions.pdf](#)
- [Small Spud Urinal Installation Instructions.pdf](#)
- [Regal Flushometers Repair and Maintenance Guide.pdf](#)
- [SS:ST:SU:WETS:WEUS Fixtures Repair and Maintenance Guide.pdf](#)
- [Fixture Brochure.pdf](#)
- [Flushometers Brochure.pdf](#)
- [Additional Downloads](#)

Videos

- [Sloan – Company Overview](#)

Details

- Flush Volume: 0.125–1.0 gpf (1.9–3.8 lpf)

Features

- Complete urinal system including REGAL flushometer Designed to maximize performance
- Thorough washdown flushing action
- Durable, hygienic vitreous china construction
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Water Sense listed by EPA that qualifies for most rebate programs
- Meets ADA guidelines and ANSI A117.1 requirements when installed accordingly

Components



- Flushometer: Code 3982604
- Urinal: Code 1107009

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

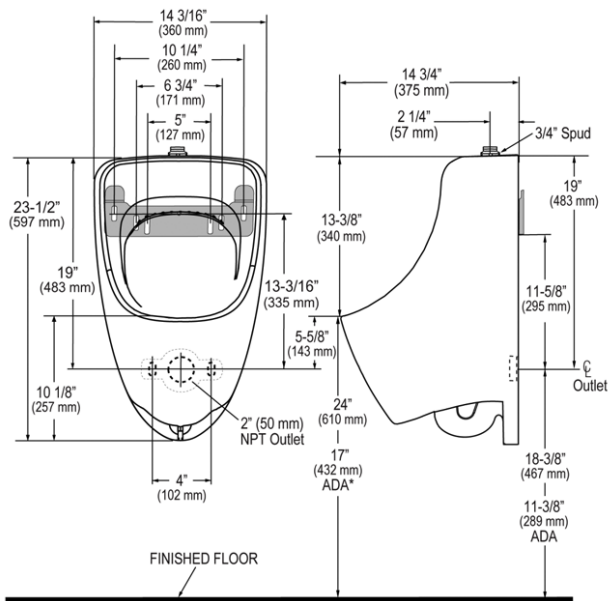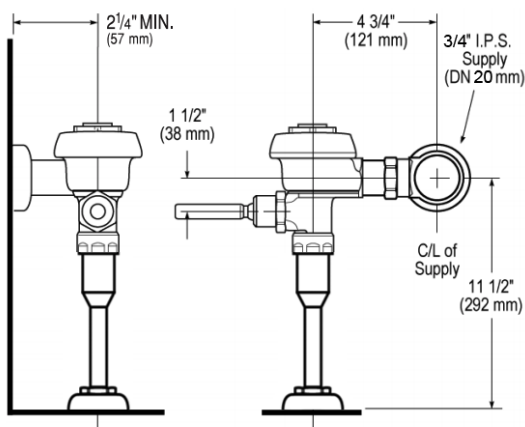

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.