

Variation Not Shown: Solid Ring Pipe Support

Sloan® Sensor Flushometer

SLOAN 111 SMO-1.28-CP

Product description

1.28 gpf, Dual-Filtered Fixed Bypass Diaphragm, Polished Chrome Finish, 1.5” Flush Connection, Fixture Connection Top Spud, Single Flush, 1” Control Stop, Electrical Override, Battery, Infrared, Sloan® Exposed Sensor Water Closet Flushometer.

Compliances & Certifications

(ADA Compliant*, BAA Compliant, BREEAM Water Credit, cUPC Green Certified, Green Globes Water, IAPMO, LEED Water, Satisfies LEED Credits, EPA WaterSense Listed)

Code 3780115

Finish

Polished Chrome (CP)

Downloads

- Sloan Exposed Installation Instructions.pdf
- Sloan Exposed (Spanish) Installation Instructions.pdf
- Side Mount Operator Unit Installation Instructions.pdf
- Control Stop Repair and Maintenance Guide.pdf
- Flush Connections Flanges Repair and Maintenance Guide.pdf
- Flushometers Brochure.pdf
- Additional Downloads

Videos

- Sloan – Company Overview

⚠ WARNING: Cancer and Reproductive Harm – www.P65Warnings.ca.gov

Sloan 10500 Seymour Ave, Franklin Park 800.982.5839 sloan.com

Details

- Flush Volume: 1.28 gpf (4.8 lpf)
- Finish: Polished Chrome (CP)
- Power Type: Battery
- Valve: Diaphragm
- Bypass: Dual-Filtered Fixed Bypass Diaphragm
- Valve Body Material: Semi-red Brass
- Fixture Type: Water Closet
- Fixture Connection: Top Spud
- Rough-in Dimension: 11.5" (292mm)
- Spud Coupling: 1.5" (38mm)
- Supply Pipe: 1" (25mm)
- Override: Electrical
- Control Stop: 1"
- Flush Connection: 1.5" (38mm)

Features

- Flush volumes start as low as 1.6 gpf/6.0 Lpf
- Water conservation is aided by the ADA-compliant, non-hold-open handle, which prevents toilet from exceeding intended flush volume
- Flush accuracy is controlled by CID™ technology, also enhancing water efficiency
- Integrity of the product is maintained with the vandal-resistant stop cap
- Durability is facilitated with high copper, low zinc brass castings for dezincification resistance
- Adjustable tailpiece to accommodate different height requirements
- High chloramine resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing Action
- Valve body, Cover, Tailpiece and Control Stop shall be in compliance with ASTM Alloy Classification for Semi-Red Brass
- Valve shall be in compliance to the applicable sections of ASSE 1037

Recommended specifications

Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Electrical specifications

- Sensor Range: 22"-42" (559 - 1067mm)

Valve Operating Pressure (Flowing)

15-80 psi (103 - 552 kPa). Specific fixtures may require greater minimum flowing pressure - consult manufacturer requirements.

Warranty

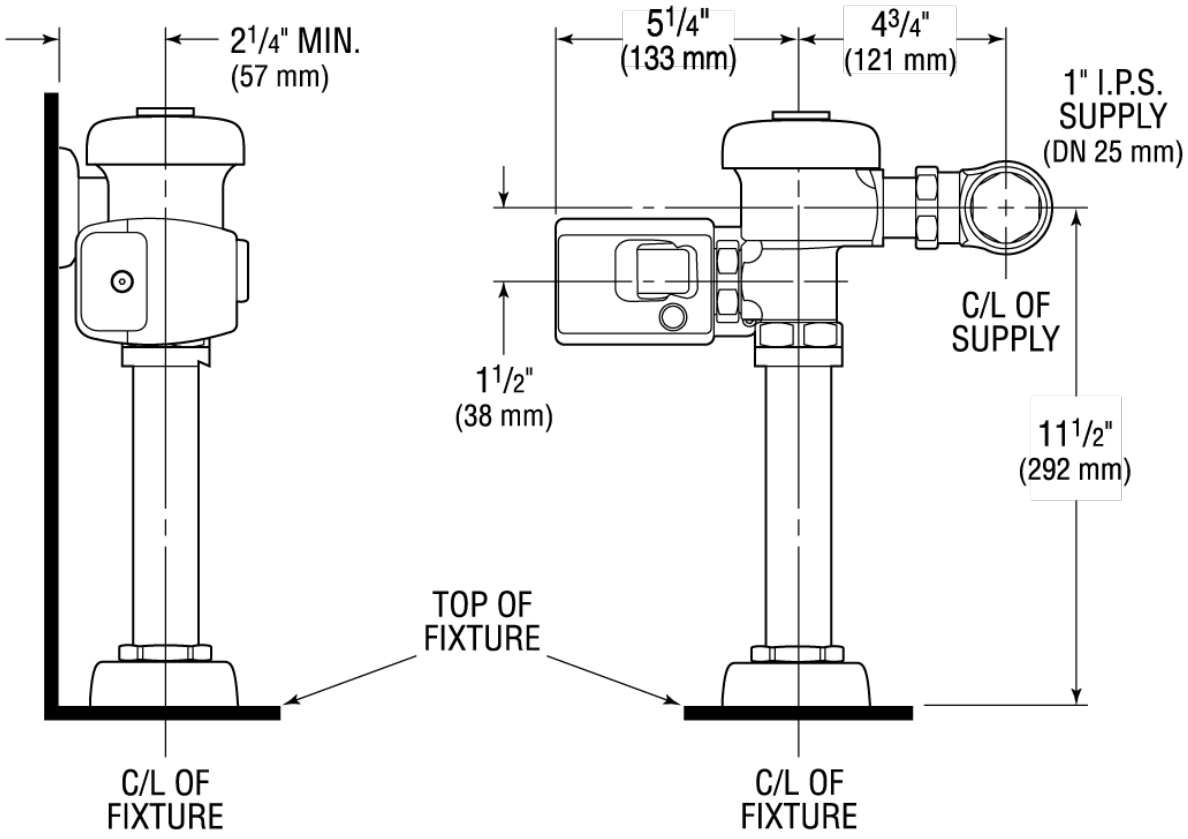
View Warranty Information

Notes

All information contained within this document subject to change without notice.

*Compliant with ADA accessibility requirements when installed according to ADA standards.
WaterSense compliant when used with a 1.28 gpf (4.8 lpf) WaterSense fixture.

Looking for other variations of the SLOAN 111 SMO product?
View the general spec sheet with all options.
Find a compatible urinal for this flushometer.
Find a compatible water closet for this flushometer.


2 1/4" MIN.
(57 mm)
5 1/4"
(133 mm)
4 3/4"
(121 mm)
1" I.P.S.
SUPPLY
(DN 25 mm)
C/L OF
SUPPLY
1 1/2"
(38 mm)
11 1/2"
(292 mm)
TOP OF
FIXTURE
C/L OF
FIXTURE
C/L OF
FIXTURE