



Urinal & Flushometer Combo

WEUS-1710.3002-STG

Product description

SloanTec® Glaze, SU-1019 Urinal and CX 8198 Flushometer.

Compliances & Certifications



(BAA Compliant, BABAA Compliant)

Code 17103002

Downloads

- [Standard Spud Urinal Installation Instructions.pdf](#)
- [CX 8158_8198 Installation Instructions.pdf](#)
- [Additional Downloads](#)

Videos

- [CX Flushometer Product Video](#)
- [CX Flushometer - Sensor Installation](#)
- [CX Flushometer - Sensor Vacuum Service](#)

Details

- Flush Volume: 0.125 gpf (0.5 lpf)

Features

- Fixed volume piston with filtered O-ring bypass
- Front access wall plate requires no rear access plumbing chase
- Sensor activated, hands-free operation
- Battery operated with hardwired option
- Electronic override button
- low Battery indicator light
- Vandal resistant wall plate
- Adjustable flush connection
- Designed to maximize and complement Sloan flushometers
- Universal high-efficiency model works with 0.125, 0.25 and 0.5 gpf Sloan flushometers
- Thorough washdown flushing action
- Durable, hygienic vitreous china construction
- Vandal resistant stainless steel strainer included
- IAPMO certified to meet or exceed ASME A112.19.2 standards
- Water Sense listed by EPA that qualifies for most rebate programs

Components


- Flushometer: Code 3400321
- Urinal: Code 1171019

Warranty

[View Warranty Information](#)

Notes

All information contained within this document subject to change without notice.

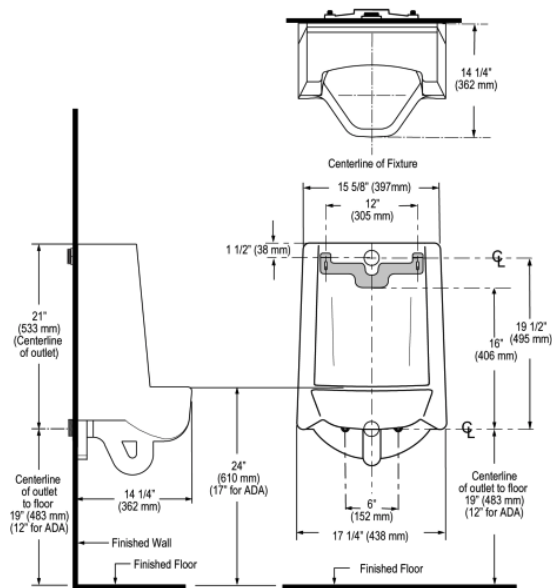

NOTE: ADA urinal rim height requirements allow all heights 17" and below. Sloan strongly recommends roughing in the drain to achieve a 16 1/2" rim height or less to ensure compliance.

