

Technical Data Sheet

Ref: TDS-02-ANC-01


Masonry & Cavity Fixings

Zip-Fix Cavity Wall Fixings - Zinc

Features

- Heavy duty cavity wall anchor for use in plasterboard, most hollow blocks, cavity walls and ceilings.
- Rapid installation, just Zip and Fix.
- All steel, non-flammable fixing conforming to BS 7671 standards 18th edition, which requires wiring systems to be supported by materials which are unlikely to prematurely collapse in the event of a fire.
- Please note: A 50mm clearance hole is required behind substrate.

Dimensional Data

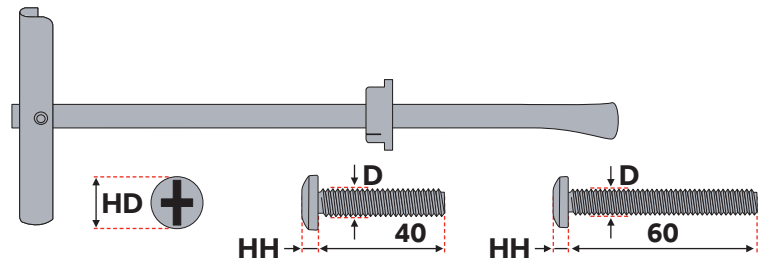

Product Code	Screw Diameter (D)	Screw Head Diameter (HD)	Screw Head Height (HH)	Fixture Clearance Hole Ø	Max Fixture Thickness
ZIP650	M6	11.6	4.5	6.0	45.0
ZIP6	M6	11.6	4.5	6.0	45.0

All stated figures (mm) are approx and for reference only.

Performance Data

Substrate	Plasterboard 12.5mm	Double Board 25mm	Dense Board 15mm	Block
Thread Ø	M6	M6	M6	M6
Drill Hole Ø (mm)	13	13	13	13
Rec. Pull out Load (kN)	0.30	0.47	0.56	0.60
Max Rec. Load (kg)	30	47	56	60

All stated figures are for reference only and to be used as a guideline. Test data stated is for reference only as this may not represent the actual figures you may achieve in application.

Installation Guide



Drill a 13mm hole in the substrate.
50mm cavity clearance required behind substrate.



Ensuring the thumb tab faces upwards, insert the metal toggle through the hole, so it pivots down behind the substrate.



Zip the nylon collar towards the wall so the collar sits into the drilled hole. Then snap off the nylon arms.



Insert a M6 screw through the fixture and into the threaded part of Zip-Fix and tighten until secure.