

Technical Data Sheet

Ref: TDS-01-DRY-01

Drywall Screws


Coarse Thread - Grey Phosphate - Bugle Head - Phillips

Features

- Used to secure plasterboard to timber stud works.
- Phillips No. 2 for a positive drive.
- Bugle head to reduce the likelihood of damaging the board surface.
- 25° super sharp point for ease of penetration.
- Coarse thread for extreme hold.
- Conforms to BS EN 14566:2008+A1:2009.

Other packaging options available, please contact sales for more information.

Dimensional Data

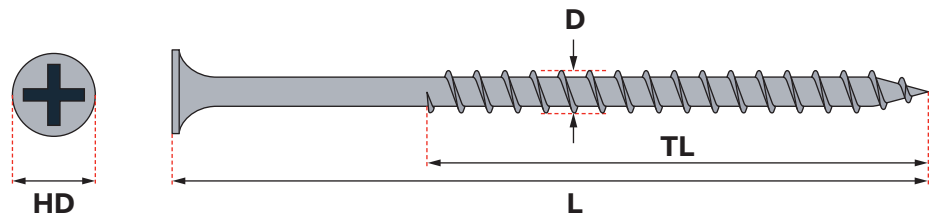

Product Code	Diameter (mm) (D)	Length (mm) (L)	Head Diameter (HD)	Thread Length (TL)
00025DRYC	3.5	25	8.5	Full
00032DRYC	3.5	32	8.5	Full
00035DRYC	3.5	35	8.5	Full
00038DRYC	3.5	38	8.5	Full
00042DRYC	3.5	42	8.5	Full
00045DRYC	3.5	45	8.5	Full
00050DRYC	3.5	50	8.5	Full
00055DRYC	3.5	55	8.5	Full
00060DRYC	3.5	60	8.5	50.0
00065DRYC	4.2	65	8.5	50.0
00075DRYC	4.2	75	8.5	50.0
00100DRYC	4.8	100	9.0	61.5
00125DRCY*	4.8	125	9.0	67.5
00150DRCY*	4.8	150	9.0	67.5

*yellow finish.
All stated figures (mm) are approx and for reference only.