

# Restraints & Wall Starters



## Heavy Duty Restraint Straps



Generally used for horizontal restraint such as roof trusses, rafters and joists tied to masonry. Designed to BS 5268 Part 3 and other building standards for lateral restraint. Manufactured from galvanised steel, for ultimate corrosion resistance use stainless steel.




## Light Duty Restraint Straps



Generally used for vertical restraint such as holding down a wall plate. Manufactured from galvanised steel, for ultimate corrosion resistance use stainless steel.



## Engineered Heavy Duty Restraint Strap

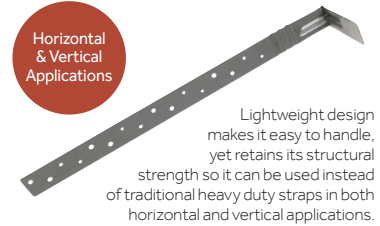

Product Code	Length (mm)	Bend (mm)	Total Length (mm)	MOQ Qty (pcs)	Qty Break (pcs)
<b>BUNDLE</b>					
<b>Galvanised Steel - 1.4mm</b>					
600ERSH	500	100	600	10	50
800ERSH	700	100	800	10	50
1000ERSH	900	100	1000	10	50
1200ERSH	1100	100	1200	10	50
1600ERSH	1500	100	1600	10	50

### Bent Strap

Product Code	Length (mm)	Bend (mm)	Total Length (mm)	MOQ Qty (pcs)	Qty Break (pcs)
<b>BUNDLE</b>					
<b>Galvanised Steel - 4.0mm</b>					
400BRSH	300	100	400	10	50
600BRSH	500	100	600	10	50
800BRSH	700	100	800	10	50
1000BRSH	900	100	1000	10	50
1200BRSH	1100	100	1200	10	50
1500BRSH	1400	100	1500	10	50
1600BRSH100	1500	100	1600	10	50
1600BRSH	1450	150	1600	10	50
<b>Stainless Steel - 4.0mm</b>					
1000BRSHS	900	100	1000	10	50
1200BRSHS	1100	100	1200	10	50

### Bent Strap

Product Code	Length (mm)	Bend (mm)	Total Length (mm)	MOQ Qty (pcs)	Qty Break (pcs)
<b>BUNDLE</b>					
<b>Galvanised Steel - 2.4mm</b>					
300BRSL	200	100	300	10	50
600BRSL	500	100	600	10	50
800BRSL	700	100	800	10	50
1000BRSL	900	100	1000	10	50
1200BRSL	1100	100	1200	10	50
1500BRSL	1400	100	1500	10	50
<b>Stainless Steel - 2.4mm</b>					
1000BRSLs	900	100	1000	10	50

### Flat Strap

Product Code	Total Length (mm)	MOQ Qty (pcs)	Qty Break (pcs)
<b>BUNDLE</b>			
<b>Galvanised Steel - 4.0mm</b>			
1000FRSH	1000	10	50

### Flat Strap

Product Code	Total Length (mm)	MOQ Qty (pcs)	Qty Break (pcs)
<b>BUNDLE</b>			
<b>Galvanised Steel - 2.4mm</b>			
1000FRSL	1000	10	50
<b>Stainless Steel - 2.4mm</b>			
1000FRSLs	1000	10	50

### Twisted Strap

Product Code	Length (mm)	Twist (mm)	Total Length (mm)	MOQ Qty (pcs)	Qty Break (pcs)
<b>BUNDLE</b>					
<b>Galvanised Steel - 4.0mm</b>					
600TRSH	500	100	600	10	50
1000TRSH	900	100	1000	10	50

### Twisted Strap

Product Code	Length (mm)	Twist (mm)	Total Length (mm)	MOQ Qty (pcs)	Qty Break (pcs)
<b>BUNDLE</b>					
<b>Galvanised Steel - 2.4mm</b>					
1000TRSL	900	100	1000	10	50

### Installation Guidelines

- For horizontal restraint
- Use a minimum of six 3.75 x 30mm square twist nails or equivalent fixed to timber joists/rafters.

## Wall Starter Kits

A stainless steel system, designed to join new walls to existing masonry, suitable for both internal and external brick or block walls. Kit includes: x2 Wall rails, x5 Plugs, coach screws, washers, x10 Wall rail connectors.



### PREMIUM PRODUCT

Product Code	Width (mm)	Length (mm)	Kit Length (2 x Profiles) (mm)	MOQ Qty (pcs)	Qty Break (pcs)
<b>BOX</b>					
<b>Stainless Steel</b>					
WSS	41	1200	2400	10	50
<b>BOX</b>					
<b>Stainless Steel</b>					
269666	41	1170	2340	12	40

### Installation Guidelines

#### For horizontal restraint

- Use a minimum of seven 3.75 x 30mm square twist nails or equivalent fixed to timber joists/rafters.

#### For vertical restraint

- Use a minimum of ten 3.75 x 30mm square twist nails or equivalent fixed to timber joists/rafters.
- When used as a vertical restraint to hold down a wallplate. Use a minimum length of 900mm