

Technical Data Sheet

Ref: TDS-01-WIN-08


Window Fabrication Screws

Countersunk - PH - High/Low Thread - Slash Point - Zinc or Yellow

Features

- Designed for multiples uses for fitting a variety of hardware to frames where there is no steel or aluminium reinforcement present.
- Slash tip with a high and low thread for quick "pick up" and excellent holding power.
- Case and core hardened carbon steel.
- PH2 recess.
- Conforms to BS EN 1670:Grade 4.
- Conforms to BS 7412.

Dimensional Data

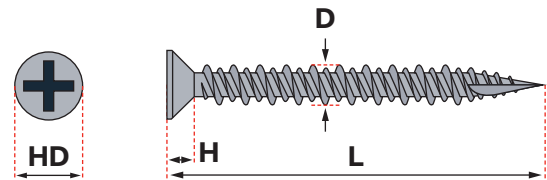

Product Code	Diameter (D)	Length (L)	Head Height (H)	Head Diameter (HD)
104Z or Y	4.3	25	3.0	7.40
105Z or Y	4.3	30	3.0	7.40
106Z or Y	4.3	40	3.0	7.40
109Z or Y*	4.8	25	3.2	7.70

*4.8mm to be used as a repair screw on stripped or damaged holes.
All stated figures (mm) are approx and for reference only.