

Technical Data Sheet

Ref: TDS-02-ANC-03


Masonry & Cavity Fixings

Spring Toggles - Combi - Pan - Zinc

Features

- A cavity fixing that is ideal for overhead installations
- The wings spread the load over a wider area making them more suited for heavier loads.
- Zinc & clear machine screws.
- NOTE: Please allow 20mm (M3) & 30mm (M5 & M6) cavity depth for the wings to open.

Dimensional Data

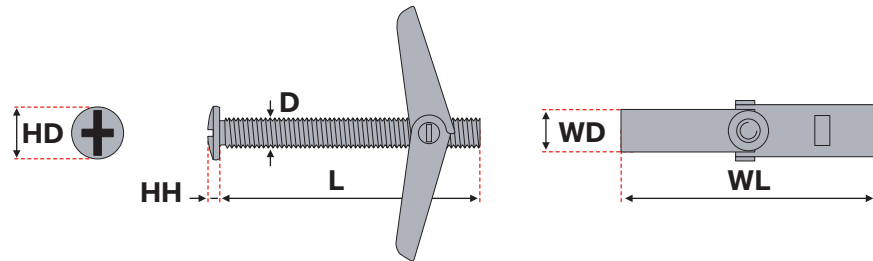

Product Code	Screw Ø x L (D x L)	Head Diameter (HD)	Head Height (HH)	Wing Length (WL)	Wing Depth (WD)	Wall & Fixture Thickness
TOG350	M3 x 50	6.3	2.5	38	6.2	30
TOG550	M5 x 50	8.5	3.0	50	9.0	20
TOG575	M5 x 75	8.5	3.0	50	9.0	45
TOG5100	M5 x 100	8.5	3.0	50	9.0	70
TOG675	M6 x 75	10.0	4.0	54	11.0	45

All stated figures (mm) are approx and for reference only.

Performance Data

Substrate	Plasterboard 12.5mm Thickness		
Screw Ø (mm)	M3	M5	M6
Drill Hole Ø (mm)	11.0	14.0	18.0
Rec. Pull Out Load (kN)	0.11	0.22	0.26
Max Rec. Load (kg)	11	22	26

All stated figures are for reference only and to be used as a guideline. Test data stated is for reference only as this may not represent the actual figures you may achieve in application.

Installation Guide

