

Technical Data Sheet


Ref: TDS-02-ANC-04

Masonry & Cavity Fixings Metal Cavity Anchors - Pan - Zinc

Features

- A cavity fixing that is ideal for hanging radiators, brackets, hand rails and shelving units.
- When installing multiple anchors a TIMco Setting Tool is recommended for a fast and efficient way of installation.
- Combi recess.

Dimensional Data

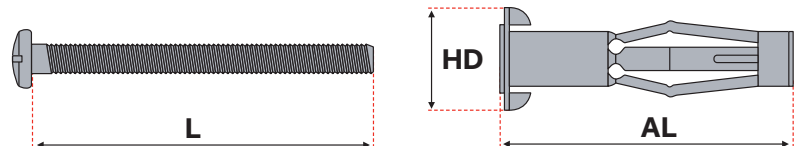

Product Code	Screw Ø x L (L)	Anchor Length (AL) (mm)	Head Diameter Ø (HD)(mm)	Grip Board (mm)	Fixture Clearance Hole (mm)	Max Fixture Thickness (mm)
40038CA	M4 x 45	38	13.0	8 - 16	4.0	8.0
40045CA	M4 x 50	45	13.0	16 - 23	4.0	16.0
50037CA	M5 x 45	37	16.0	6 - 13	5.0	30.0
50052CA	M5 x 60	52	16.0	7 - 16	5.0	17.0
50065CA	M5 x 70	65	16.0	17 - 32	5.0	26.0
60052CA	M6 x 60	52	17.5	7 - 16	6.0	30.0
60065CA	M6 x 70	65	17.5	17 - 32	6.0	26.0

All stated figures (mm) are approx and for reference only.

Performance Data

Substrate	Plasterboard 12.5mm		
Screw Ø (mm)	M4	M5	M6
Drill Hole Ø (mm)	8.0	10.0	12.0
Rec. Pull Out Load (kN)	0.12	0.14	0.20
Max Rec. Load (kg)	12	14	20

All stated figures are for reference only and to be used as a guideline. Test data stated is for reference only as this may not represent the actual figures you may achieve in application.

Installation Guide

