

Technical Data Sheet

Ref: TDS-01-RF-18


Metal Construction Slash Point Screw

Slash Point Screw - Hex - Slash Point - Zinc

Features

- Designed to attach sheet metal (max 0.8mm) to timber.
- 8mm hex head for improved driving performance with a socket driver.
- 16mm EPDM washer to prevent water ingress.
- Zinc.
- Single slash point to reduce torque and the risk of timber splitting at low edge distance.
- 60° Single deep thread.

Dimensional Data

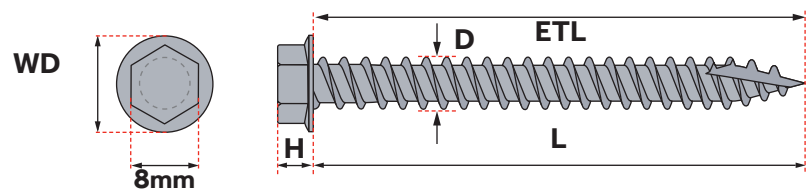

Product Code	Diameter (mm) (D)	Length (mm) (L)	Head Height (mm) (H)	Fixed Washer Diameter (mm) (WD)	Effective Thread Length (mm) (ETL)
ZDS25W16	6.3	25	4.4	12.0	22.0
ZDS32W16	6.3	32	4.4	12.0	29.0
ZDS45W16	6.3	45	4.4	12.0	42.0
ZDS60W16	6.3	60	4.4	12.0	57.0
ZDS80W16	6.3	80	4.4	12.0	77.0
ZDS100W16	6.3	100	4.4	12.0	97.0

All stated figures (mm) are approx and for reference only.