

Technical Data Sheet

Ref: TDS-02-ANP-01


Masonry & Cavity Fixings Speed Plugs - Metal or Nylon

Features


- A rapid light duty plasterboard fixing for use in a wide range of applications.
- Cross recess head, allows simple installation with a screw driver. Metal speed plugs come with screws.
- 3 point tip for quick insertion.
- Nylon plugs are ideal for electrical installation due to non-conductivity of material.

Dimensional Data

Metal Speed Plug - TBAZS

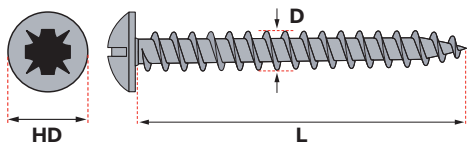

Nylon Speed Plug - TBAN

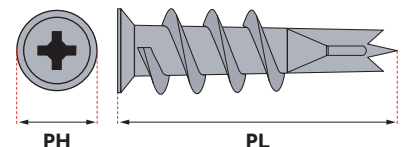

Product Code	Screw Head Ø (HD)	Screw Ø x L (D x L)	Plug Length (PL)	Plug head Ø (PH)	Max Fixture Thickness (MFT)	Point Ø
TBAZS	8.8	4.5 x 30	31.5	13.0	6	6
TBAN	-	-	42.0	13.0	-	6


All stated figures (mm) are approx and for reference only.

Performance Data


Substrate	Plasterboard 12.5mm	Plasterboard 12.5mm
Type	Metal	Nylon
Rec. Tensile Load (kN)	0.09	0.04
Max Rec. Load (kg)	9	4

All stated figures are for reference only and to be used as a guideline. Test data stated is for reference only as this may not represent the actual figures you may achieve in application.

Installation Guide



Drive plug into plasterboard



Place screw through fixture and tighten until secure

Please note a pre drilled hole may be required for dense plasterboard.