

Technical Data Sheet

Ref: TDS-01-COL-02

Collated Fine Thread Bugle head - PH - Zinc


Features

- Used to secure plasterboard to metal stud work (Max 0.6mm thick).
- 60° twin-thread offers excellent pull-out values and insertion speed.
- 25° Sharp point for ease of penetration.
- Zinc.
- Phillips No. 2 for a positive drive.
- Bugle head to reduce the likelihood of damaging the board surface.
- Conforms to BS EN 14566:2008+A1:2009.
- Unique yellow collated strips are specifically designed to be compatible with all leading power tool brands.



Fire
Classification
A1

Dimensional Data

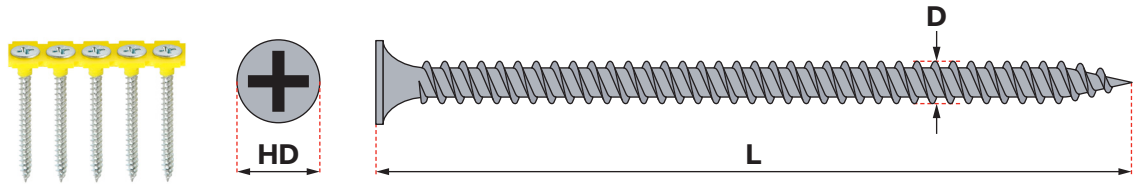

Product Code	Diameter (D)	Length (L)	Head Diameter (HD)	Thread Length
00025COLDZYS	3.5	25	8.25	25
00032COLDZYS	3.5	32	8.25	32
00035COLDZYS	3.5	35	8.25	35
00038COLDZYS	3.5	38	8.25	35
00042COLDZYS	3.5	42	8.25	42
00050COLDZYS	3.5	50	8.25	50
00055COLDZYS	3.5	55	8.25	55

All stated figures (mm) are approx and for reference only.