

Technical Data Sheet


Ref: TDS-01-TAS-01

Self Tapping Screws Pan Head - A2 Stainless Steel

Features

- Used for stitching metal or attaching to metal. A pre-drilled hole is required.
- 60° Self tapping thread.
- A2 Stainless steel for ultimate corrosive resistance.
- Pan head for extra clamping.
- Pozi recess.
- Manufactured to DIN 7981.

Dimensional Data

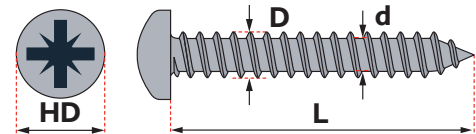

Product Code	Size (D x L)	Inner Diameter (d)	Driver Bit Size	Head Diameter (HD)
2965CPASS	2.9 x 6.5	2.10	PZ1	5.5
2995CPASS	2.9 x 9.5	2.10	PZ1	5.5
3595CPASS	3.5 x 9.5	2.55	PZ2	6.9
3513CPASS	3.5 x 13	2.55	PZ2	6.9
3519CPASS	3.5 x 19	2.55	PZ2	6.9
3525CPASS	3.5 x 25	2.55	PZ2	6.9
3938CPASS	3.9 x 38	2.80	PZ2	7.5
4295CPASS	4.2 x 9.5	3.00	PZ2	8.0
4213CPASS	4.2 x 13	3.00	PZ2	8.0
4216CPASS	4.2 x 16	3.00	PZ2	8.0
4219CPASS	4.2 x 19	3.00	PZ2	8.0
4225CPASS	4.2 x 25	3.00	PZ2	8.0
4232CPASS	4.2 x 32	3.00	PZ2	8.0
4825CPASS	4.8 x 25	3.50	PZ2	9.5
4832CPASS	4.8 x 32	3.50	PZ2	9.5
4838CPASS	4.8 x 38	3.50	PZ2	9.5
4850CPASS	4.8 x 50	3.50	PZ2	9.5
5519CPASS	5.5 x 19	4.10	PZ3	10.5
5525CPASS	5.5 x 25	4.10	PZ3	10.5

All stated figures (mm) are approx and for reference only.