

Technical Data Sheet

Ref: TDS-01-DRY-02

Drywall Screws


Fine Thread - Bugle Head - Phillips

Features

- Used to secure plasterboard to wall/ceiling track systems with a max of 0.6mm thickness.
- Phillips No. 2 for a positive drive.
- Bugle head to reduce the likelihood of damaging the board surface.
- Available in grey phosphate or zinc finishes.
- 25° super sharp point for ease of penetration.
- 60° twin-thread offers excellent pull-out values and insertion speed
- Conforms to BS EN 14566:2008+A1:2009.

Other packaging options available, please contact sales for more information.

Dimensional Data

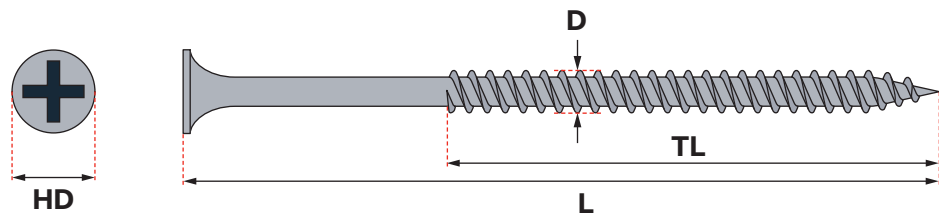

Product Code	Diameter (mm) (D)	Length (mm) (L)	Head Diameter (HD)	Thread Length (TL)
00025DRY	3.5	25	8.5	Full
00032DRY	3.5	32	8.5	Full
00035DRY	3.5	35	8.5	Full
00038DRY	3.5	38	8.5	Full
00042DRY	3.5	42	8.5	Full
00045DRY	3.5	45	8.5	Full
00050DRY	3.5	50	8.5	Full
00055DRY	3.5	55	8.5	Full
00060DRY	3.5	60	8.5	50.0
00065DRY	4.2	65	8.5	50.0
00075DRY	4.2	75	8.5	50.0
00090DRY	4.8	90	9.0	61.5
00100DRY	4.8	100	9.0	61.5
00125DRYZ*	4.8	125	9.0	67.5
00150DRYZ*	4.8	150	9.0	67.5

*Zinc only.

Please note for zinc versions please add Z to the end of the product code. For example 00045DRYZ.
All stated figures (mm) are approx and for reference only.

Performance Data

Test material	:	Drywall Track	Drywall Track	Drywall Track
Screw diameter	:	3.5	4.2	4.8
Test plate thickness	:	0.6mm	0.6mm	0.6mm
Rec. Pull out (kN)	:	0.23	0.24	0.32

Test data stated is for reference only as this may not represent the actual figures you may achieve in application.

Installation Data

Diameter	:	3.5	4.2	4.8
RPM	:	1800-2500	1800-2500	1800-2500
Max. Drill capacity	:	0.6mm	0.6mm	0.6mm