

Unreinforced Frames



100 Range

Zinc Yellow



PHILLIPS

- Countersunk head with ribs
- High-Low thread
- Slash tip

Multiple uses for fitting a variety of hardware to frames where there is no steel or aluminium reinforcement present.
*Repair screws for stripped holes.

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX					
Zinc					
104Z	4.3x25	PH2	1,000	8	384
105Z	4.3x30	PH2	1,000	8	384
106Z	4.3x40	PH2	1,000	8	192
109Z*	4.8x25	PH2	1,000	8	384
Yellow					
104Y	4.3x25	PH2	1,000	8	384
105Y	4.3x30	PH2	1,000	8	384
106Y	4.3x40	PH2	1,000	8	192
109Y*	4.8x25	PH2	1,000	8	384

WIN01

200 Range

Zinc Yellow A2/Aust. SS




PHILLIPS

- Countersunk head with ribs
- Single thread
- Gimlet tip

Multiple uses for fitting a variety of hardware to frames where there is no steel or aluminium reinforcement present.
*Repair screws for stripped holes.

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX					
Zinc					
201Z	4.3x16	PH2	1,000	15	540
202Z	4.3x20	PH2	1,000	15	540
204Z	4.3x25	PH2	1,000	8	384
205Z	4.3x30	PH2	1,000	8	384
203Z	4.3x35	PH2	1,000	6	288
206Z	4.3x40	PH2	1,000	8	192
207Z	4.3x45	PH2	500	8	384
208Z	4.3x55	PH2	500	6	288
209Z*	4.8x25	PH2	1,000	8	384
210Z*	4.8x38	PH2	1,000	8	192

WIN01

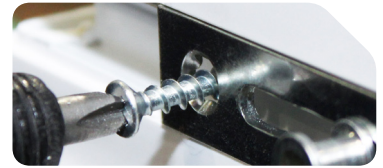

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX					
Yellow					
201Y	4.3x16	PH2	1,000	15	540
202Y	4.3x20	PH2	1,000	15	540
204Y	4.3x25	PH2	1,000	8	384
205Y	4.3x30	PH2	1,000	8	384
203Y	4.3x35	PH2	1,000	6	288
206Y	4.3x40	PH2	1,000	8	192
207Y	4.3x45	PH2	500	8	384
208Y	4.3x55	PH2	500	6	288
209Y*	4.8x25	PH2	1,000	8	384

WIN01

A2/Aust. Stainless Steel					
202SS	4.3x20	PH2	1,000	15	540
204SS	4.3x25	PH2	1,000	8	384
205SS	4.3x30	PH2	1,000	8	384
203SS	4.3x35	PH2	1,000	6	288
206SS	4.3x40	PH2	1,000	8	192
209SS*	4.8x25	PH2	1,000	8	384

WSS01

111 Range

Zinc



PHILLIPS



FS FRICTION STAY

- Shallow pan countersunk head
- High-Low thread
- Slash tip

For attaching friction stays to PVCu frames. An alternative to the single thread range offering a slash point and a High-Low thread to aid speed of insertion and pull out.

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX					
Zinc					
111Z	4.3x20	PH2	1,000	8	384
112Z	4.3x25	PH2	1,000	8	384

WIN01

215 Range

Zinc A2/Aust. SS



PHILLIPS



FS FRICTION STAY

- Shallow pan head with serrations
- Single thread
- Gimlet tip

For attaching friction stays with pre-drilled holes to PVCu frames. Stainless steel screws should be used where there is a corrosive environment.

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX					
Zinc					
215Z	4.8x16	PH2	1,000	8	384
216Z	4.8x20	PH2	1,000	8	384
217Z	4.8x25	PH2	1,000	6	288
218Z	4.8x30	PH2	1,000	8	192

WIN07

A2/Aust. Stainless Steel					
215SS	4.8x16	PH2	1,000	8	384
216SS	4.8x20	PH2	1,000	8	384
217SS	4.8x25	PH2	1,000	6	288
218SS	4.8x30	PH2	1,000	8	192

WSS02

211 Range

Zinc A2/Aust. SS



PHILLIPS



FS FRICTION STAY

- Shallow pan countersunk head
- Single thread
- Gimlet tip

For attaching friction stays with countersunk holes to PVCu frames. Stainless steel screws should be used where there is a corrosive environment.

Product Code	Size (mm)	Driver Bit Size	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX					
Zinc					
211Z	4.3x16	PH2	1,000	15	540
212Z	4.3x20	PH2	1,000	8	384
212Z	4.3x25	PH2	1,000	8	384

WIN07

A2/Aust. Stainless Steel					
211SS	4.3x16	PH2	1,000	15	540
212SS	4.3x20	PH2	1,000	8	384
212SS	4.3x25	PH2	1,000	8	384

WSS02