

Technical Data Sheet

Ref: TDS-02-ANP-02


Masonry & Cavity Fixings

Hammer-In Fixings - PZ - Yellow

Features

- A rapid light duty plasterboard fixing with zinc and yellow passivation to enhance corrosion resistance.
- Serrated point for easy hammering and quick installation.
- Comes complete with screws.
- No drilling required.
- Does not rotate when screwing.
- PZ2 recess.
- Available in other package types.

Dimensional Data

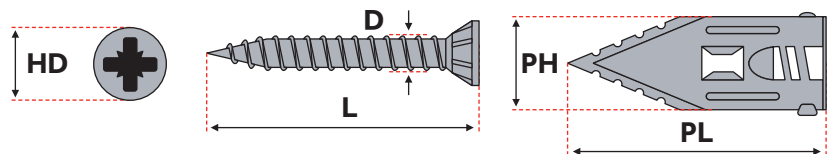

Product Code	Screw Head Ø (HD)	Screw Ø x L (D x L)	Metal Plug Length (PL)	Metal Plug Head Ø (PH)	Max Fixture Thickness
HPF30	8.0	4.0 x 30	30.0	11.0	6

All stated figures (mm) are approx and for reference only.

Performance Data

Substrate	Plasterboard 12.5mm
Screw Size (mm)	4.0 x 30
Metal Plug Size (mm)	11.0 x 30
Max Fixture Thickness (mm)	6.0
Rec. Pull out (kN)	0.15
Max Rec. Load (kg)	15

All stated figures are for reference only and to be used as a guideline. Test data stated is for reference only as this may not represent the actual figures you may achieve in application.

Installation Guide

