


Collated Drywall Screws



Coarse Thread Screw

Black Phosphate

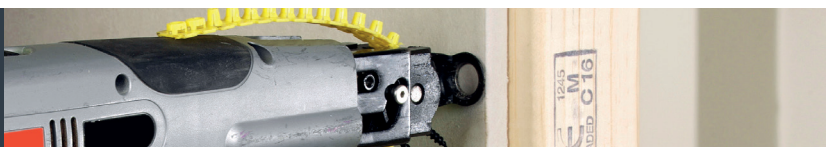

PHILLIPS



EN 14566



TIMBER STUD WORK

Used to secure plasterboard to timber stud work.

Note: Partially threaded from 60mm.

Product Code	Size (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX				
00025COLDYS	3.5 x 25	1,000	10	320
00032COLDYS	3.5 x 32	1,000	10	320
00035COLDYS	3.5 x 35	1,000	10	320
00038COLDYS	3.5 x 38	1,000	10	240
00045COLDYS	3.5 x 45	1,000	10	240
00050COLDYS	3.5 x 50	1,000	10	240
00055COLDYS	3.5 x 55	1,000	10	240
00065COLDYS	4.2 x 65	500	10	240
00075COLDYS	4.2 x 75	500	10	240

COL01

TUB

00035CDRYTUB	3.5 x 35	1,000	6	144
00038CDRYTUB	3.5 x 38	1,000	6	144
00045CDRYTUB	3.5 x 45	1,000	6	144
00055CDRYTUB	3.5 x 55	800	6	144

COL01

Fine Thread Screw

Zinc



PHILLIPS



EN 14566



METAL STUD WORK

Used to secure plasterboard to wall/ceiling track systems with a max. of 0.6mm thickness.

Note: Partially threaded from 60mm.

Product Code	Size (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX				
00025COLDZYS	3.5 x 25	1,000	10	320
00032COLDZYS	3.5 x 32	1,000	10	320
00035COLDZYS	3.5 x 35	1,000	10	320
00038COLDZYS	3.5 x 38	1,000	10	240
00042COLDZYS	3.5 x 42	1,000	10	240
00050COLDZYS	3.5 x 50	1,000	10	240
00055COLDZYS	3.5 x 55	1,000	10	240

COL02

Self-Drilling Screw

Zinc



PHILLIPS



EN 14566



METAL STUD WORK

Self-drilling point to aid fixing plasterboard to wall / ceiling track systems with a max. of

2.0mm thickness.

Product Code	Size (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX				
00035COLLSD	3.5 x 35	1,000	10	320
00040COLLSD	3.5 x 40	1,000	10	240
00045COLLSD	3.5 x 45	1,000	10	240
00050COLLSD	3.5 x 50	1,000	10	240

COL03

Plasterers Blend SBR Primer

A high-performance, multi-purpose SBR primer specifically designed to make plastering faster, easier, and more reliable. Unlike standard SBRs, it's engineered for professional plastering use, delivering consistent results, superior adhesion, reduced suction, and smooth plaster flow — even on tricky jobs and varied surfaces.

Visible Coverage

Moisture & Alkali Resistant

Suitable for exterior surfaces

Over 40% Greater Coverage -
50% Less Drying Time -
More than **250%** Higher Bond Strength!



Page 194