

Technical Data Sheet

Ref: TDS-01-DRY-03


Drywall Screws

High/Low Thread - Reduced Countersunk Head - Black Phosphate - Phillips

Features

- Used to secure denseboard to metal stud works (Max 0.6mm thickness).
- Phillips No. 2 for a positive drive.
- Reduced countersunk head with ribs for improved countersinking into denseboard.
- High-Low thread for increased pull-out value into both timber and thin sheet metal.
- 25° super sharp point for ease of penetration.
- Conforms to BS EN 14566:2008+A1:2009.

Dimensional Data

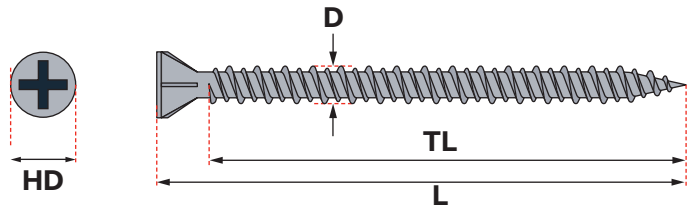

Product Code	Diameter (mm) (D)	Length (mm) (L)	Head Diameter (HD)	Thread Length (TL)
00030DRYD	3.9	30	6.8	25.0
00045DRYD	3.9	45	6.8	40.0
00055DRYD	3.9	55	6.8	50.0

All stated figures (mm) are approx and for reference only.