

Technical Data Sheet


Ref: TDS-01-MAC-02

Machine Screw Countersunk - Zinc

Features

- Countersunk machine screws commonly used in pre-drilled and threaded holes.
- Metric thread.
- Zinc CR3.
- Conforms to DIN965

Dimensional Data

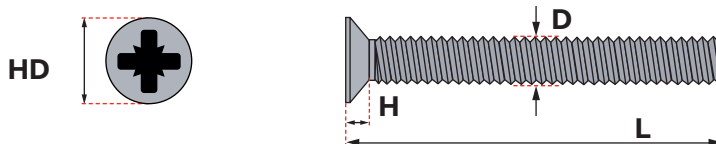

Product Code	Diameter (D)	Length (L)	Head Diameter (HD)	Head Height (HH)	Thread Pitch (P)
4008CPM	M4	8	8.0	2.0	0.75
4010CPM	M4	10	8.0	2.0	0.75
4012CPM	M4	12	8.0	2.0	0.75
4020CPM	M4	20	8.0	2.0	0.75
4025CPM	M4	25	8.0	2.0	0.75
4040CPM	M4	40	8.0	2.0	0.75
5010CPM	M5	10	10.0	2.3	0.75
5012CPM	M5	12	10.0	2.3	0.75
5016CPM	M5	16	10.0	2.3	0.75
5020CPM	M5	20	10.0	2.3	0.75
5025CPM	M5	25	10.0	2.3	0.75
5030CPM	M5	30	10.0	2.3	0.75
5040CPM	M5	40	10.0	2.3	0.75
5050CPM	M5	50	10.0	2.3	0.75
6010CPM	M6	10	12.0	2.7	1.0
6012CPM	M6	12	12.0	2.7	1.0
6016CPM	M6	16	12.0	2.7	1.0
6020CPM	M6	20	12.0	2.7	1.0
6025CPM	M6	25	12.0	2.7	1.0
6030CPM	M6	30	12.0	2.7	1.0
6040CPM	M6	40	12.0	2.7	1.0
6050CPM	M6	50	12.0	2.7	1.0

All stated figures (mm) are approx and for reference only.