

Technical Data Sheet


Ref: TDS-01-ST5-02

Self Tapping Screws Countersunk - Zinc

Features

- Used for stitching metal or attaching to metal. A pre-drilled hole is required.
- 60° Self tapping thread.
- Zinc CR3 plated.
- Countersunk head gives a discreet finish into pre-countersunk holes.
- Pozi recess.
- Manufactured to BS 4174:1972.

Dimensional Data

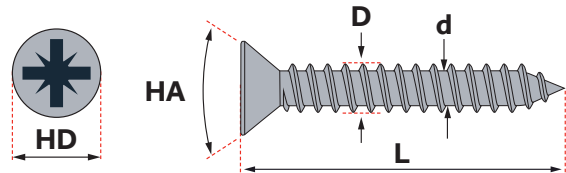

Product Code	Size (D x L)	Inner Diameter (d)	Driver Bit Size	Head Diameter (HD)	Head Angle (HA)
00612CCAJS	3.5 x 13	2.55	PZ2	7.0	80°
00658CCAJS	3.5 x 16	2.55	PZ2	7.0	80°
00061CCAJS	3.5 x 25	2.55	PZ2	7.0	80°
00812CCAJS	4.2 x 13	3.00	PZ2	8.0	80°
00834CCAJS	4.2 x 19	3.00	PZ2	8.0	80°
00081CCAJS	4.2 x 25	3.00	PZ2	8.0	80°
08114CCAJS	4.2 x 32	3.00	PZ2	8.0	80°
08112CCAJS	4.2 x 38	3.00	PZ2	8.0	80°
08134CCAJS	4.2 x 44	3.00	PZ2	8.0	80°
00082CCAJS	4.2 x 50	3.00	PZ2	8.0	80°
00101CCAJS	4.8 x 25	3.50	PZ2	9.0	80°
10114CCAJS	4.8 x 32	3.50	PZ2	9.0	80°
10112CCAJS	4.8 x 38	3.50	PZ2	9.0	80°
00102CCAJS	4.8 x 50	3.50	PZ2	9.0	80°
12112CCAJS	5.5 x 38	4.10	PZ3	11.0	80°

All stated figures (mm) are approx and for reference only.