

Technical Data Sheet

Ref: TDS-01-WIN-04


Window Fabrication Screws

Shallow Countersunk with Ribs - PH - Single Thread - Gimlet Tip -
Zinc or Yellow

Features

- Multiple uses for fitting a variety of hardware to frames where there is no steel or aluminium reinforcement present.
- Shallow countersunk head with ribs for improved countersinking.
- Gimlet tip with single coarse thread.
- PH2 recess.
- Case and core hardened carbon steel.
- Conforms to BS EN 1670:Grade 4.
- Conforms to BS 7412.

Dimensional Data

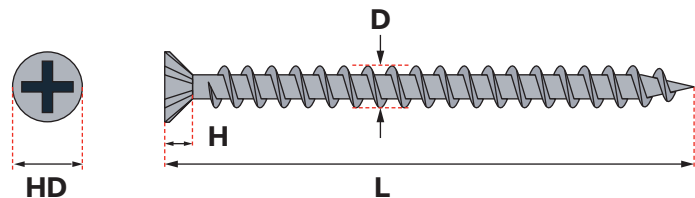

Product Code	Diameter (D)	Length (L)	Head Height (H)	Head Diameter (HD)
201Z or Y	4.3	16	2.7	7.6
202Z or Y	4.3	20	2.7	7.6
204Z or Y	4.3	25	2.7	7.6
205Z or Y	4.3	30	2.7	7.6
203Z or Y	4.3	35	2.7	7.6
206Z or Y	4.3	40	2.7	7.6
207Z or Y	4.3	45	2.7	7.6
208Z or Y	4.3	55	2.7	7.6
209Z or Y*	4.8	25	2.8	8.0
210Z*	4.8	38	2.8	8.0

* 4.8mm Repair screw for stripped and damaged holes.
All stated figures (mm) are approx and for reference only.