

Technical Data Sheet

Ref: TDS-01-RF-17


Metal Construction Slash Point Screw

Slash Point Screw - Hex - Slash Point - Exterior

Features

- Designed to attach sheet metal (max 0.8mm) to timber.
- 8mm hex head for improved driving performance with a socket driver.
- EPDM washer to prevent water ingress.
- Exterior plated to achieve in excess of 500hrs in accordance with BS EN 9227.
- Single slash point to reduce torque and the risk of timber splitting at low edge distance.
- 60° Single deep thread.
- Available in other package types.

Dimensional Data

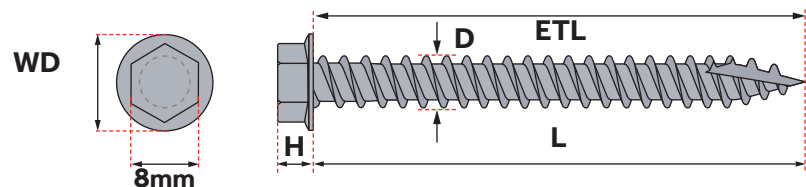

Product Code	Diameter (mm) (D)	Length (mm) (L)	Head Height (mm) (H)	Fixed Washer Diameter (mm) (WD)	EPDM Washer (mm)	Effective Thread Length (mm) (ETL)
DS25W16B	6.3	25.0	5.7	12.0	16.0	22.0
DS32W16B	6.3	32.0	5.7	12.0	16.0	29.0
DS45W16B	6.3	45.0	5.7	12.0	16.0	42.0
DS45W19B	6.3	45.0	5.7	12.0	19.0	42.0
DS60W16B	6.3	60.0	5.7	12.0	16.0	57.0
DS60W19B	6.3	60.0	5.7	12.0	19.0	57.0
DS80W16B	6.3	80.0	5.7	12.0	16.0	77.0
DS100W16B	6.3	100.0	5.7	12.0	16.0	97.0
DS125W16B	6.3	125.0	5.7	12.0	16.0	122.0
DS150W16B	6.3	150.0	5.7	12.0	16.0	80 *P/T

All stated figures (mm) are approx and for reference only.