

Technical Data Sheet


Ref: TDS-01-TAS-02

Self Tapping Screws Countersunk - A2 Stainless Steel

Features

- Used for stitching metal or attaching to metal. A pre-drilled hole is required.
- 60° Self tapping thread.
- A2 Stainless steel for ultimate corrosive resistance.
- Countersunk head gives a discreet finish into pre-countersunk holes.
- Pozi recess.
- Manufactured to DIN 7982.

Dimensional Data

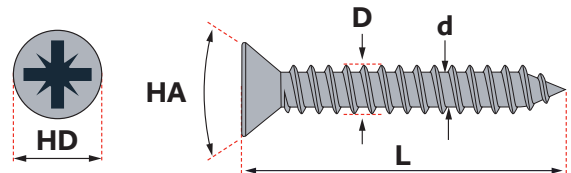

Product Code	Size (D x L)	Inner Diameter (d)	Driver Bit Size	Head Diameter (HD)	Head Angle (HA)
2913CCASS	2.9 x 13	2.10	PZ1	5.5	80°
2919CCASS	2.9 x 19	2.10	PZ1	5.5	80°
3525CCASS	3.5 x 25	2.55	PZ2	6.5	80°
3995CCASS	3.9 x 9.5	2.55	PZ2	6.5	80°
3913CCASS	3.9 x 13	2.55	PZ2	6.5	80°
3925CCASS	3.9 x 25	2.55	PZ2	6.5	80°
3938CCASS	3.9 x 38	2.55	PZ2	6.5	80°
4295CCASS	4.2 x 9.5	3.00	PZ2	8.0	80°
4213CCASS	4.2 x 13	3.00	PZ2	8.0	80°
4216CCASS	4.2 x 16	3.00	PZ2	8.0	80°
4225CCASS	4.2 x 25	3.00	PZ2	8.0	80°
4232CCASS	4.2 x 32	3.00	PZ2	8.0	80°
4238CCASS	4.2 x 38	3.00	PZ2	8.0	80°
4819CCASS	4.8 x 19	4.10	PZ2	9.5	80°
4850CCASS	4.8 x 50	4.10	PZ2	9.5	80°

All stated figures (mm) are approx and for reference only.