


P-RVV M-WD

Flow from male stud end
with captive seal: NBR* (e. g. Perbunan)
Stud thread: metric (parallel)

Strömung vom Einschraubzapfen
mit Weichdichtung: NBR* (z. B. Perbunan)
Einschraubgewinde: Metrisches Gewinde (zylindrisch)

Sortie par l'embout mâle
avec joint mou: NBR* (p. ex. Perbunan)
Filetage mâle: métrique (cylindrique)

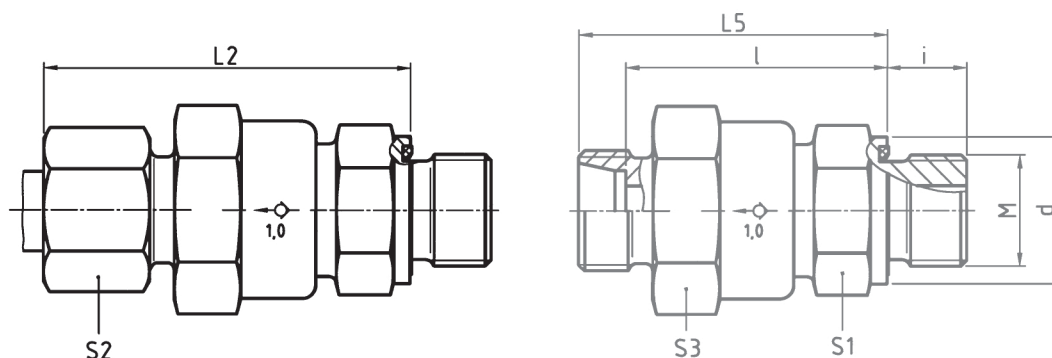

Series	bar	Tube OD	Type	Reference	kg per 100 pcs.											Ø outlet
Reihe	PN	Rohr-AD	Typ	Best.-Nr.	kg per 100 St.											Ø entspr. Durchlaß
Série	(psi)	Tube Ø ext.	Désignation	Réf.	kg par 100 p.											Ø de pas-sage correspondant
						M	d	L ₂	L ₅	I	i	S ₁	S ₂	S ₃		
L	400 (5801)	6	M 10 x 1	P-RVV 6 LM-WD	WAL374005	11,5	13,9	50,5	43	36	8	22	14	27	4,0	
		8	M 12 x 1,5	P-RVV 8 LM-WD	WAL374006	13,0	16,9	50,5	43	36	12	22	17	27	6,0	
		10	M 14 x 1,5	P-RVV 10 LM-WD	WAL374007	12,6	18,9	48,5	41	34	12	22	19	27	7,0	
		12	M 16 x 1,5	P-RVV 12 LM-WD	WAL374008	16,5	21,9	53,5	46	39	12	22	22	27	7,5	
		15	M 18 x 1,5	P-RVV 15 LM-WD	WAL374009	21,2	23,9	56	48	41	12	27	27	32	11,0	
		18	M 22 x 1,5	P-RVV 18 LM-WD	WAL374010	29,7	29,9	61,5	53	45,5	14	27	32	32	11,0	
	250 (3626)	22	M 26 x 1,5	P-RVV 22 LM-WD	WAL374011	51,6	31,9	69,5	61	53,5	16	41	36	46	18,0	
		28	M 33 x 2	P-RVV 28 LM-WD	WAL374012	68,2	39,9	77	68	60,5	18	41	41	46	18,5	
		35	M 42 x 2	P-RVV 35 LM-WD	WAL374013	155,5	49,9	88,5	77,5	67	20	60	50	70	29,0	
		42	M 48 x 2	P-RVV 42 LM-WD	WAL609988	161,2	54,9	87,5	75,5	64,5	22	60	60	70	29,0	
S	400 (5801)	6	M 12 x 1,5	P-RVV 6 SM-WD	WAL374014	12,8	16,9	52,5	45	38	12	22	17	27	4,0	
		8	M 14 x 1,5	P-RVV 8 SM-WD	WAL374015	13,6	18,9	50,5	43	36	12	22	19	27	5,0	
		10	M 16 x 1,5	P-RVV 10 SM-WD	WAL374016	15,1	21,9	53,5	45	37,5	12	22	22	27	7,0	
		12	M 18 x 1,5	P-RVV 12 SM-WD	WAL374017	18,7	23,9	55,5	47	39,5	12	24	24	27	7,5	
		14	M 20 x 1,5	P-RVV 14 SM-WD	WAL374018	24,5	25,9	59,5	50	42	14	27	27	32	10,0	
		16	M 22 x 1,5	P-RVV 16 SM-WD	WAL374019	29,1	26,9	62,5	53	44,5	14	27	30	32	11,0	
		20	M 27 x 2	P-RVV 20 SM-WD	WAL374020	55,3	31,9	74	63	52,5	16	41	36	46	16,0	
	250 (3626)	25	M 33 x 2	P-RVV 25 SM-WD	WAL374021	73,5	39,9	77	65	53	18	41	46	46	18,5	
		30	M 42 x 2	P-RVV 30 SM-WD	WAL374022	105,3	49,9	87	74	60,5	20	50	50	55	24,0	
		38	M 48 x 2	P-RVV 38 SM-WD	WAL374023	200,4	54,9	96	81,5	65,5	22	60	60	70	29,0	

L₂ = approximate length with nut tightened
L₂ = Ungefährmaß bei angezogener Überwurfmutter
L₂ = longueur approximative, l'écrou étant bloqué

* FPM (e. g. Viton) on request
* FPM (z. B. Viton) auf Anfrage
* FPM (p. ex. Viton) sur demande

