

Aluminium Manifolds



Material: Aluminium

Working Temperature: -20°C to +70°C

Maximum Working Pressure: 10 bar




Equal Cross Manifolds



Product Code	A	B mm	C mm	D mm	E mm	F mm	Weight Kg
MAN-145.8	G1/8"	23	30	16	4.25	22	0.030
MAN-145.4	G1/4"	30	40	20	5.25	27	0.065
MAN-145.3	G3/8"	39	50	25	6.25	38	0.120
MAN-145.2	G1/2"	39	50	25	6.25	38	0.090

Double Distribution Manifolds

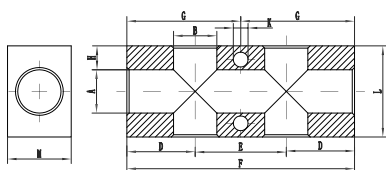

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	Weight Kg
MAN-155.22	G1/8"	M5	15	15	45	22.5	3.5	20	15	4.25	0.030
MAN-151.22	G1/4"	G1/8"	15	30	60	30.0	4.5	30	20	5.25	0.075
MAN-152.22	G3/8"	G1/4"	18	36	72	36.0	6.0	40	20	6.50	0.105
MAN-153.22	G3/8"	G1/8"	18	30	66	33.0	4.5	40	20	5.25	0.137
MAN-154.22	G1/2"	G1/4"	22	36	80	40.0	6.0	40	28	6.50	0.200
MAN-156.22	G1/2"	G3/8"	25	40	90	45.0	6.0	40	28	6.50	0.170
MAN-157.22	G1/2"	G1/2"	30	40	100	50.0	6.0	40	28	6.50	0.175

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	Weight Kg
MAN-155.33	G1/8"	M5	15	15	60	22.5	3.5	20	15	4.25	0.041
MAN-151.33	G1/4"	G1/8"	15	30	90	30.0	4.5	30	20	5.25	0.110
MAN-152.33	G3/8"	G1/4"	18	36	108	36.0	6.0	40	20	6.50	0.165
MAN-153.33	G3/8"	G1/8"	18	30	96	33.0	4.5	40	20	5.25	0.195
MAN-154.33	G1/2"	G1/4"	22	36	116	40.0	6.0	40	28	6.50	0.278
MAN-156.33	G1/2"	G3/8"	25	40	130	45.0	6.0	40	28	6.50	0.245
MAN-157.33	G1/2"	G1/2"	30	40	140	50.0	6.0	40	28	6.50	0.240

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	Weight Kg
MAN-155.44	G1/8"	M5	15	15	75	22.5	3.5	20	15	4.25	0.061
MAN-151.44	G1/4"	G1/8"	15	30	120	30.0	4.5	30	20	5.25	0.150
MAN-152.44	G3/8"	G1/4"	18	36	144	36.0	6.0	40	20	6.50	0.220
MAN-153.44	G3/8"	G1/8"	18	30	120	33.0	4.5	40	20	5.25	0.253
MAN-154.44	G1/2"	G1/4"	22	36	152	40.0	6.0	40	28	6.50	0.364
MAN-156.44	G1/2"	G3/8"	25	40	170	45.0	6.0	40	28	6.50	0.235
MAN-157.44	G1/2"	G1/2"	30	40	180	50.0	6.0	40	28	6.50	0.315

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	Weight Kg
MAN-155.55	G1/8"	M5	15	15	90	22.5	3.5	20	15	4.25	0.061
MAN-151.55	G1/4"	G1/8"	15	30	150	30.0	4.5	30	20	5.25	0.190
MAN-152.55	G3/8"	G1/4"	18	36	180	36.0	6.0	40	20	6.50	0.280
MAN-153.55	G3/8"	G1/8"	18	30	156	33.0	4.5	40	20	5.25	0.311
MAN-154.55	G1/2"	G1/4"	22	36	188	40.0	6.0	40	28	6.50	0.450
MAN-156.55	G1/2"	G3/8"	25	40	210	45.0	6.0	40	28	6.50	0.400
MAN-157.55	G1/2"	G1/2"	30	40	220	50.0	6.0	40	28	6.50	0.385

Aluminium Manifolds




Material: Aluminium

Working Temperature: -20°C to +70°C


Maximum Working Pressure: 10 bar




Double Distribution Manifolds

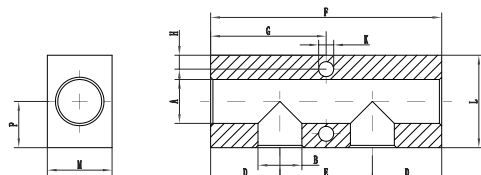


Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	P mm	Weight Kg
MAN-155.02	G1/8"	M5	15	15	45	22.5	3.5	20	15	4.25	10	0.032
MAN-151.02	G1/4"	G1/8"	15	30	60	30.0	4.5	30	20	5.25	15	0.080
MAN-152.02	G3/8"	G1/4"	18	36	72	36.0	6.0	40	20	6.50	20	0.110
MAN-153.02	G3/8"	G1/8"	18	30	66	33.0	4.5	40	20	5.25	20	0.137
MAN-154.02	G1/2"	G1/4"	22	36	80	40.0	6.0	40	28	6.50	20	0.200
MAN-156.02	G1/2"	G3/8"	25	40	90	45.0	6.0	40	28	6.50	20	0.180
MAN-157.02	G1/2"	G1/2"	30	40	100	50.0	6.0	40	28	6.50	20	0.195

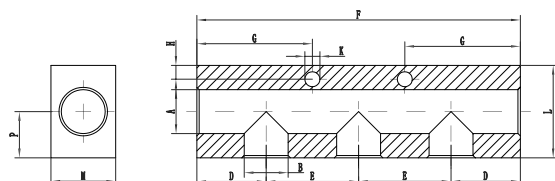


Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	P mm	Weight Kg
MAN-155.02	G1/8"	M5	15	15	60	22.5	3.5	20	15	4.25	10	0.043
MAN-151.02	G1/4"	G1/8"	15	30	90	30.0	4.5	30	20	5.25	15	0.115

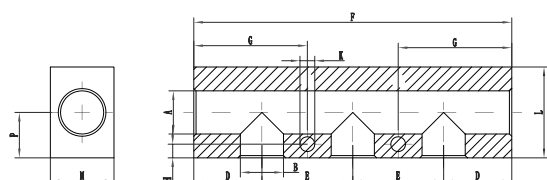

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	P mm	Weight Kg
MAN-152.03	G3/8"	G1/4"	18	36	108	36.0	6.0	30	20	6.50	19	0.120
MAN-153.03	G3/8"	G1/8"	18	30	96	33.0	4.5	30	20	5.25	19	0.120
MAN-154.03	G1/2"	G1/4"	22	36	116	40.0	6.0	40	28	6.50	20	0.240
MAN-156.03	G1/2"	G3/8"	25	40	130	45.0	6.0	40	28	6.50	20	0.265
MAN-157.03	G1/2"	G1/4"	30	40	140	50.0	6.0	40	28	6.50	20	0.275

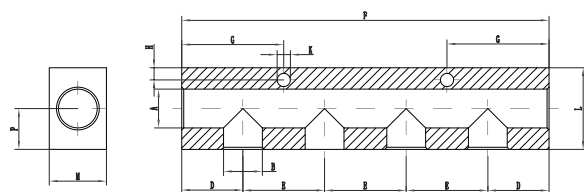

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	P mm	Weight Kg
MAN-155.04	G1/8"	M5	15	15	75	22.5	3.5	20	15	4.25	10	0.053
MAN-151.04	G1/4"	G1/8"	15	30	120	30.0	4.5	30	20	5.25	15	0.158

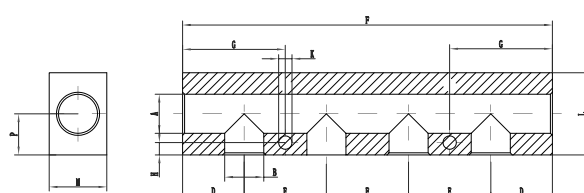

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	P mm	Weight Kg
MAN-152.04	G3/8"	G1/4"	18	36	144	36.0	6.0	30	20	6.50	19	0.160
MAN-153.04	G3/8"	G1/8"	18	30	126	33.0	4.5	30	20	5.25	19	0.160
MAN-154.04	G1/2"	G1/4"	22	36	152	40.0	6.0	40	28	6.50	20	0.315
MAN-156.04	G1/2"	G3/8"	25	40	170	45.0	6.0	40	28	6.50	20	0.350
MAN-157.04	G1/2"	G1/2"	30	40	180	50.0	6.0	40	28	6.50	20	0.355


Aluminium Manifolds




Material: Aluminium

Working Temperature: -20°C to +70°C


Maximum Working Pressure: 10 bar

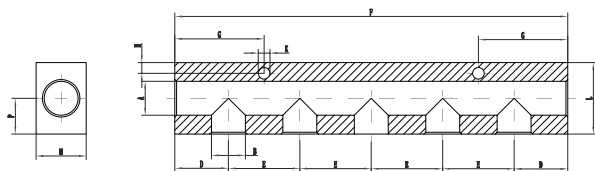


Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	P mm	Weight Kg
MAN-155.05	G1/8"	M5	15	15	90	22.5	3.5	20	15	4.25	10	0.064
MAN-151.05	G1/4"	G1/8"	15	30	150	30.0	4.5	30	20	5.25	15	0.200

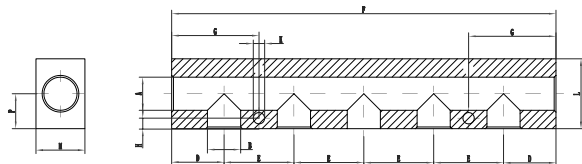

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	P mm	Weight Kg
MAN-152.05	G3/8"	G1/4"	18	36	180	36.0	6.0	30	20	6.50	19	0.205
MAN-153.05	G3/8"	G1/8"	18	30	156	33.0	4.5	30	20	5.25	19	0.205
MAN-154.05	G1/2"	G1/4"	22	36	188	40.0	6.0	40	28	6.50	20	0.395
MAN-156.05	G1/2"	G3/8"	25	40	210	45.0	6.0	40	28	6.50	20	0.430
MAN-157.05	G1/2"	G1/2"	30	40	220	50.0	6.0	40	28	6.50	20	0.435

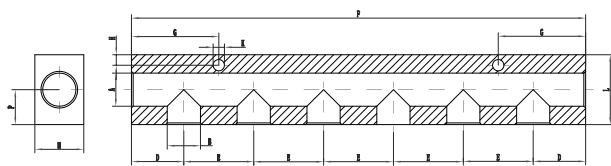

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	P mm	Weight Kg
MAN-155.06	G1/8"	M5	15	15	90	22.5	3.5	20	15	4.25	10	0.064
MAN-151.06	G1/4"	G1/8"	15	30	150	30.0	4.5	30	20	5.25	15	0.200

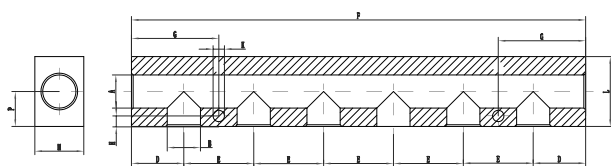

Product Code	A	B	D mm	E mm	F mm	G mm	H mm	L mm	M mm	K mm	P mm	Weight Kg
MAN-152.06	G3/8"	G1/4"	18	36	216	36.0	6.0	30	20	6.50	19	0.250
MAN-153.06	G3/8"	G1/8"	18	30	186	33.0	4.5	30	20	5.25	19	0.250
MAN-154.06	G1/2"	G1/4"	22	36	224	40.0	6.0	40	28	6.50	20	0.470
MAN-156.06	G1/2"	G3/8"	25	40	250	45.0	6.0	40	28	6.50	20	0.515
MAN-157.06	G1/2"	G1/2"	30	40	260	50.0	6.0	40	28	6.50	20	0.510