




Globe Valves - Gunmetal/Brass

- A range of globe valves designed to open and close quickly for positive shut-off and for regulating purposes.
- Threaded BSP parallel/Teflon Disk/Rising Stem/Screwed-in Bonnet Handwheel operation.
- Manufactured in accordance with BS 5154 PN 20 Series B.
- Test Pressures (Hydraulic): Shell 30 bar. Seat 22 bar.

 **Temperature Ranges:**
at 20 bar: -10°C to +100°C
at 9 bar: +180°C

Type 6062, BSPP				
Part code	BSPP Thread	Length	Height	KG
GBV-12	1/2"	58	97	0.32
GBV-34	3/4"	70	109	0.56
GBV-1	1"	84	127	0.80
GBV-114	1.1/4"	92	149	1.30
GBV-112	1.1/2"	107	158	1.56
GBV-2	2"	126	174	2.65

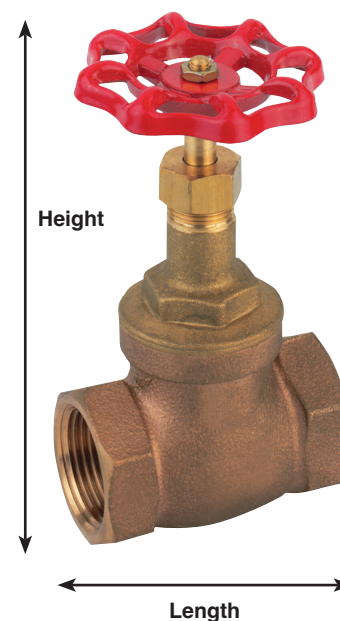

Technical Characteristics

Temperature and Pressures

Minimum pressure: 0.3 bar

Maximum pressure: 10 bar (1MPa)

Minimum Temperature -18°C

Maximum temperature: +70°C

Threads

Parallel gas in conformity with ISO 228

Connection Tubes

Various types of fittings used on the pneumatic systems and metallic threaded tubes.



Fluids

Compressed air

ATTENTION!

THE FREE EXHAUST TO ATMOSPHERE DO NOT ALLOW TO USE THE VALVE WITH TOXICS, CORROSIVES AND INFLAMMABLE GAS.

6050 Quick Exhaust Valve

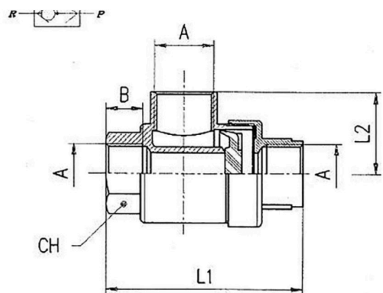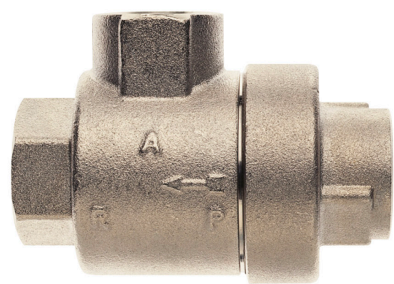

Type 6050, Metric & BSPP					
Part code	A	B	L1	L2	CH
6050-M5	M5	4	25	10	17
6050-18	1/8"	8.5	42	19.5	15
6050-14	1/4"	11	54	25	19
6050-38	3/8"	12	60.5	26.5	22
6050-12	1/2"	15	72	32	26
6050-34	3/4"	18.5	88	37	32