

Pressure Reducing Valve, Direct Acting Popper



USE AND OPERATION:

This valve allows to preserve constant the pressure downstream, regardless of the upstream pressure.

15-55 bar range available on request.

MATERIALS AND FEATURES:

Body: zinc-plated steel.

Internal parts: hardened and ground steel.

Seals: BUNA N standard

Leakage: 70 cc/min (350 Bar to port P)


APPLICATIONS:

Connect P to the main circuit, the port Reg. to the circuit where you want to reduce pressure and port T to the tank.


Oil temperature: 50° C - Oil viscosity: 30 cSt

BSPP


Part Number	Thread	Pressure Range Bar	Max Flow Lt/min
PREDV06	3/8"	30-165	350
PREDV08	1/2"	30-165	350



PRESSURE /FLOW

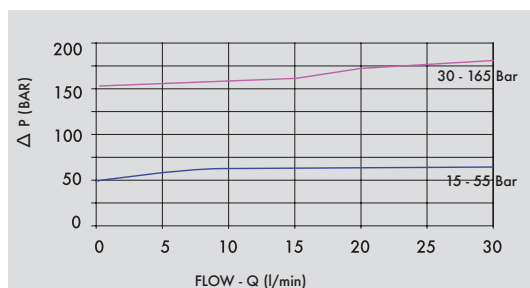

*000 = please specify the desired setting range. See the table below.

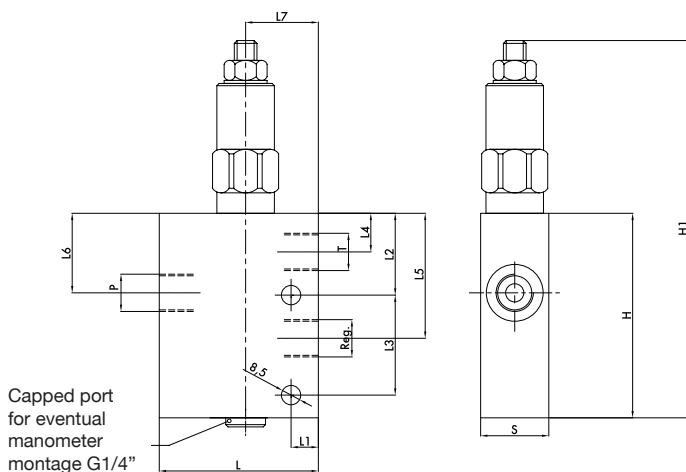

CODE	TYPE	P - T - Reg GAS	L mm	L1 mm	L2 mm	L3 mm	L4 mm	L5 mm	L6 mm	L7 mm	H mm	H1 mm	S mm	WEIGHT Kg
PREDV06	VRP 3/8"	3/8"	70	12	36	44	17	55	35	32	90	168	30	1,530
PREDV08	VRP 1/2"	1/2"	70	12	36	44	17	55	35	32	90	168	30	1,468

CODICE CODE	CAMPO DI TARATURA SETTING RANGE (Bar)	REGOLAZIONE - ADJUSTEMENT
PREDV06	15 - 55	CODICE/V • CODE/V Volantino • Handknob
PREDV08	30 - 165	CODICE/PP • CODE/PP Predisposizione alla piombatura • Arranged for sealing cap
		CODICE/P • CODE/PP Piombatura • Sealing cap