



Mountable High Pressure Water Steel Hose Reel



Features

- Heavy duty steel construction
- Corrosion-resistant powder coating
- Robust reinforced base construction
- Four-direction non-snag rollers
- Multi-position ratchet lock
- Spring fully enclosed and lubricated
- Full flow swivel prevents leakage
- Nine position guide arm adjustment





Benefits

- Long lasting
- Used in most environments
- Stable support
- Reduces hose wear
- Easy tension adjustment
- Low maintenance
- Versatile usage
- Permits wall, ceiling or floor mount

High Pressure Water Hose Reel

SWHR-30-38MB222K

Hose material	2 wire rubber
Hose working length	30m
Hose internal bore	3/8"
Inlet	3/8" BSP female
Outlet	M22 x 1.5 female
Maximum working pressure	150 bar (2,175 psi)
Working temperature	-40°C to +155°C

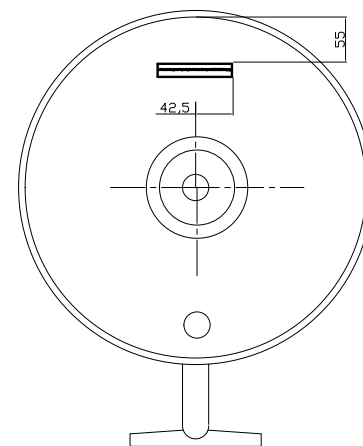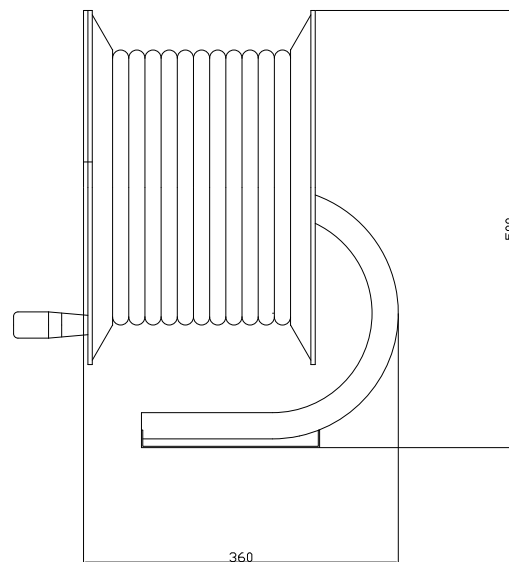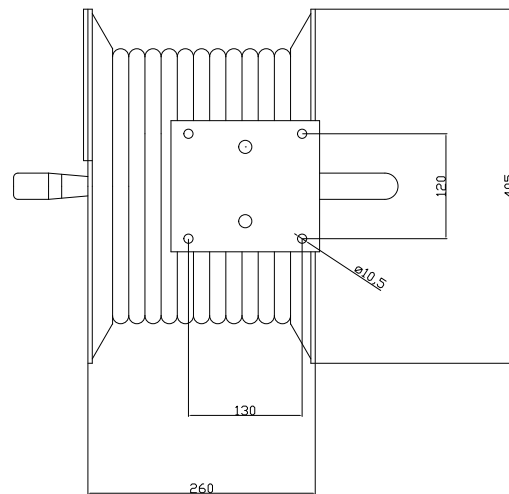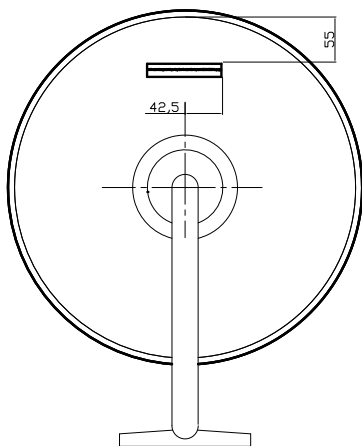

UNLESS OTHER WISE STATED		NAME	DATE	TITLE		
DIMENSIONS IN MM	DRAWN	DB	28032013	CONAH HOSE REEL		
TOLERANCES	CHECKED					
FRACTIONAL +/- 0.10	ENG APP			SIZE	DWG NO A SWHR-30-38	
2 DECIMAL PLACES +/-0.1	MFG APP					
MATERIAL		GA		COMMENTS		
		SCALE 1:1	WEIGHT		SHEET 1 OF 1	

Assembly Instructions for Feed Hose to Hose Reel

STAGE 1

Standard
Hose Reel



STAGE 5

Thread
your Feeder
Hose
through the
Rotating
Joint
Connection
on Hose
Reel




STAGE 2

Remove
Clip from
Brass
Rotating
Joint



STAGE 6

Thread Feeder
Hose through
till Rotating
Joint butts up
to Hose Reel
and protrudes
out of angle on
Fixing Bracket
(1mtr of hose
required)

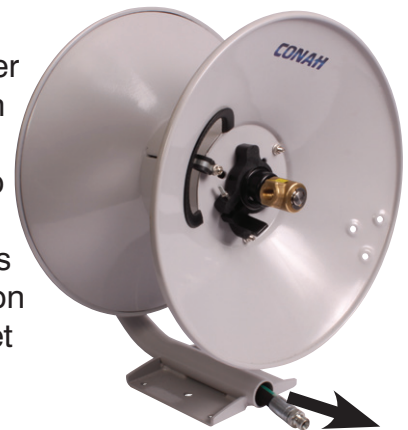

STAGE 3

Remove
Brass
Rotating
Joint from
Hose Reel



STAGE 7

Replace
Clip on
to Brass
Rotating
Joint



STAGE 4

Attach your Feeder Hose to the
3/8" BSPP Female Thread on
Brass Rotating Joint



STAGE 8

Assembly
Instruction
for Feed
Hose
Complete

