



Mountable Steel Air Hose Reel



Features

- Heavy ribbed steel plate
- Spring located in the centre
- Four-direction non-snag hose rollers
- Adjustable arm guide
- Elegant appearance, dual pedestal base
- Special swivel joint
- Ball bearing swivel joint structure
- Corrosion-resistant powder coating


Benefits

- Strong support
- Ensures reel stability
- Reduces hose wear
- Enables wall, floor, ceiling and pit mounting
- Versatile usage
- Easy maintenance and repair
- Reduces friction, extending service life
- Used in most environments

Air Hose Reel

SAHR-20-12SHV06T

Hose material	Hi-Vis RPVC
Hose working length	20m
Hose internal bore	3/8"
Inlet	3/8" BSP female
Outlet	3/8" BSPT male
Maximum working pressure	20 bar (290 psi)
Working temperature	-20°C to +80°C

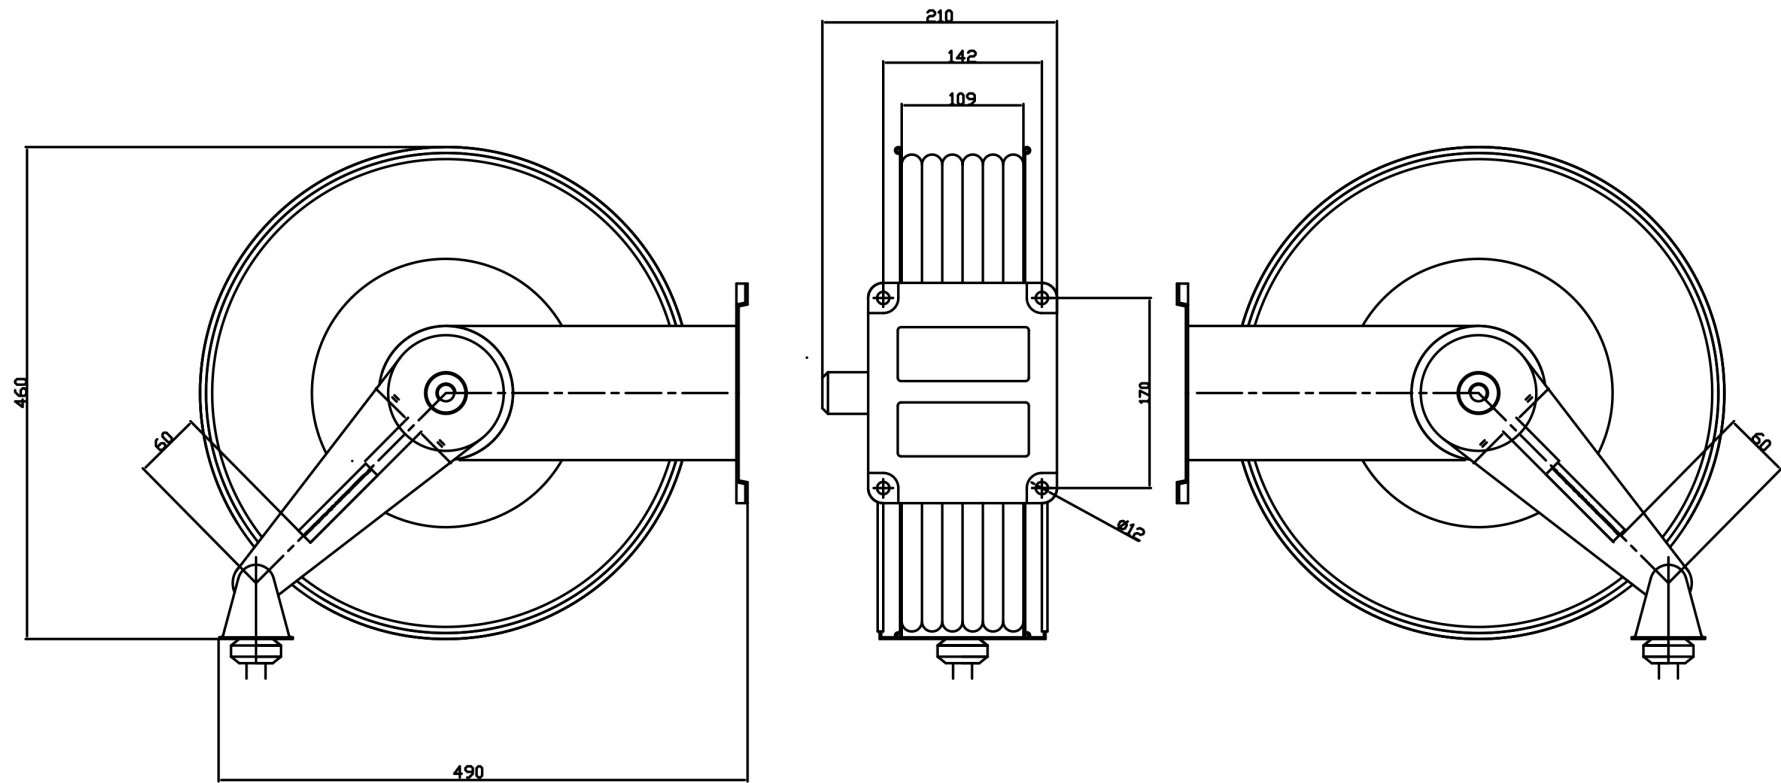

UNLESS OTHER WISE STATED		NAME	DATE	TITLE
DIMENSIONS IN MM	DRAWN	DB	27032013	CONAH HOSE REEL
TOLERANCES	CHECKED			
FRACTIONAL +/- 0.10	ENG APP			SIZE DWG NO A SAHR-15-12
2 DECIMAL PLACE +/- 0.1	MFG APP			
MATERIAL		GA		COMMENTS
				SCALE 1:1 WEIGHT SHEET 1 OF 1