



PVC Valves

Material:

- Body and remaining components - PVC U
- Sphere back ups - TPE
- Lever - PVC U
- O’Ring gaskets - EPDM


Standards

- Joints valves - DIN 8063; ISO 727/85
- Screwing valves - DIN 2999;ISO 7/1

Working Temperature:

0°C to +60°C
0°C to +20°C (at 16 bar)

Maximum Working Pressure: 16 bar

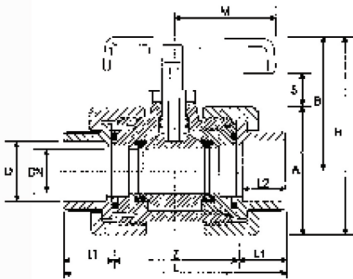

UPVC, Double Union Ball Valve, EPDM Seals

Part number	D (mm)	DN BSP Threaded	A (mm)	B (mm)	H (mm)	L (mm)	M (mm)	S (mm)	Z (mm)	L1 (mm)	L2 (mm)
2020-0424	20	1/2"	48	46	70	84	35	10	44	20	17
2020-0432	25	3/4"	68	71	105	110	54	18	66	22	19
2020-0440	32	1"	68	71	105	118	54	18	66	26	23
2020-0457	40	1.1/4"	95	93	141	149	65	21	88	30.5	27
2020-0465	50	1.1/2"	95	93	141	157	65	21	88	23.5	31
2020-0473	63	2"	115	107	164	185	74	23	102	41.5	38