




ART 350

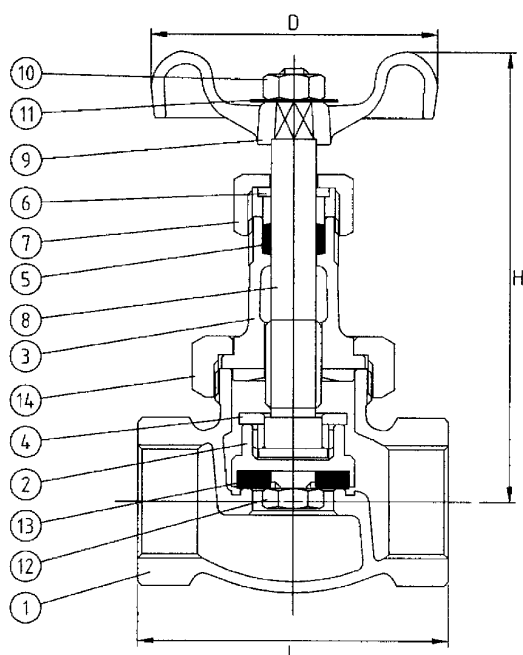

Technical Data

Maximum Pressure 32 Bar


Working Temperature -10⁰C to +200⁰C

PN32 Bronze Globe Valve

Features

- Screwed BSP Taper
- Bronze Body
- Union Bonnet
- Rising Stem
- PTFE Renewable Disc
- BS 5154B

Pressure / Temperature

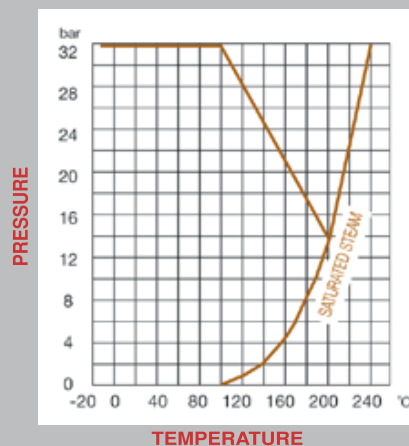

N.	Part Name	Materials
1	Body	Bronze ASTM B62 C83600
2	Disc	Bronze ASTM B62 C83600
3	Bonnet	Bronze ASTM B62 C83600
4	Lock Nut	Brass ASTM B16 C36000
5	Stem Packing	Teflon PTFE
6	Gland	Brass ASTM B16 C36000
7	Packing Nut	Brass ASTM B16 C36000
8	Stem	DZR
9	Hand Wheel	Cast Iron ASTM A126 Class B
10	Wheel Nut	Steel ASTM A563 Zn Plated
11	Name Plate	Aluminium ASTM B29 1100
12	Disc Nut	1/2 - 3/4" Brass - 1-2" Bronze
13	Disc Teflon	Teflon PTFE
14	Union Nut	Bronze ASTM B62 C83600

DN	15	20	25	32	40	50
L	56.0	70.5	80.0	96.5	110.0	129.0
H	42.5	51.0	58.0	68.0	78.0	96.0
D	53.0	63.5	68.5	80.0	90.0	103.0
CV	3.5	6.6	12.0	22.0	30.0	50.0
Kgs	0.46	0.66	0.98	1.44	2.16	3.23

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice.