



HUK Wafer Pattern Butterfly Valve

- Wafer pattern butterfly valves to suit BS 10 Table D/E, PN6/10/16 and ANSI150 flanges
- Available in cast iron, ductile iron, stainless steel or carbon steel body
- Stainless steel, ductile iron ENP and aluminium bronze disc options available
- Liners available in EPDM, NBR, FPM, silicone or PTFE on silicone

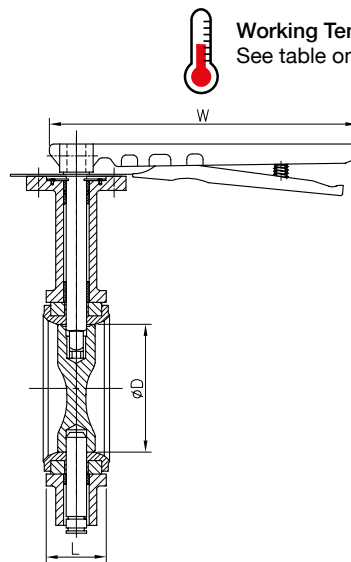

Working Temperature:
See table on page 2

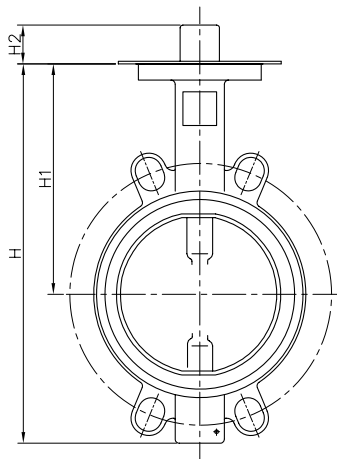

Maximum Working
Pressure:
16 bar

Dimensions


Size	DN	H	H1	H2	ØD	L	W	Torque (Nm) - Excluding Safety	Kg (Lever)	Kg (Gearbox)
1.1/2"	40	185	120	29	42.30	33	215	11	1.83	5.34
2"	50	220	140	29	52.90	43	215	12	2.68	6.19
2.1/2"	65	239	150	29	64.50	46	215	20	3.45	6.96
3"	80	253	158	29	78.80	46	215	30	4.08	7.59
4"	100	289	175	29	104	52	215	50	4.83	9.05
5"	125	317	190	29	123.30	56	215	77	7.34	10.87
6"	150	351	212	29	155.60	56	215	121	8.20	11.73
8"	200	409	235	40	202.50	60	350	242	14.90	29.80
10"	250	468	265	40	250.50	68	350	352	23.80	31.22
12"	300	547	305	40	301.60	78	see page 2	490	-	40.80
14"	350	635	368	40	333.50	78	see page 2	920	-	54.50
16"	400	709	400	36	389.60	102	see page 2	1440	-	89.85
18"	450	762	422	36	440.50	114	see page 2	1780	-	107.40
20"	500	802	440	36	491.60	127	see page 2	2210	-	155.80
24"	600	1017	565	46	592.50	154	see page 2	3980	-	564.10

HUK Wafer Pattern Butterfly Valve

Part No.	Seat Material	Working Temperature
2014WW	WRAS EPDM	-20°C to +120°C
2014WB	NBR	0°C to +80°C
2014WC	EPDM	-20°C to +120°C
2014WD	NBR	0°C to +80°C
2014WF	NBR	0°C to +80°C
2014WI	FPM	-20°C to +200°C
2014WG	Silicone	-30°C to +180°C
2014WH	PTFE on Silicone	-30°C to +180°C
2014WS	EPDM	-20°C to +120°C
2014WT	NBR	0°C to +80°C
2014WU	PTFE on Silicone	-30°C to +180°C


Gearbox Dimensions

Size	DN	L1	H2	H3	ØW
1.1/2"	40	226	64	-	150
2"	50	226	64	-	150
2.1/2"	65	226	64	-	150
3"	80	226	64	-	150
4"	100	226	64	-	150
5"	125	226	64	-	150
6"	150	226	64	-	150
8"	200	313	64	-	300
10"	250	313	64	-	300
12"	300	313	64	-	300
14"	350	313	64	-	300
16"	400	254	110	45	300
18"	450	254	110	45	300
20"	500	254	110	45	300
24"	600	254	110	45	300

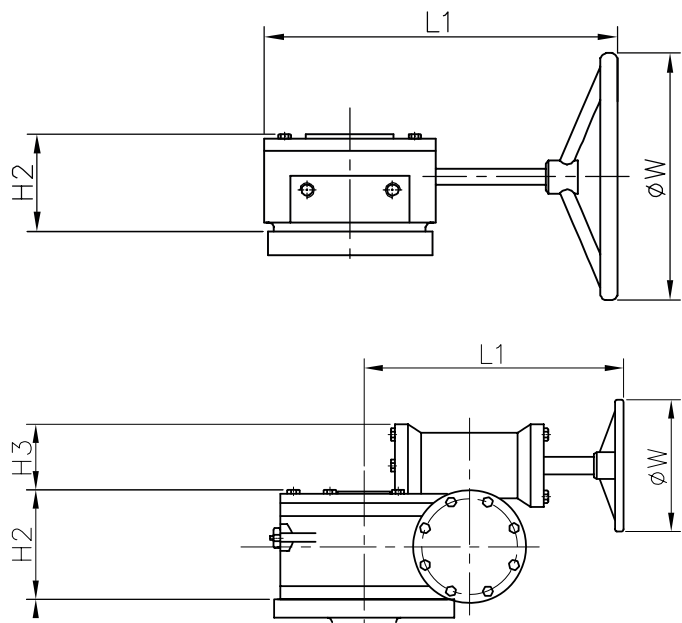


HUK Wafer Pattern Butterfly Valve


EPDM: PRESSURE/TEMPERATURE GRAPHS

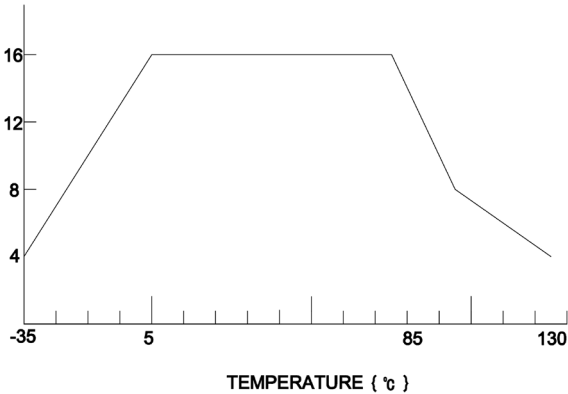


NBR: PRESSURE/TEMPERATURE GRAPHS

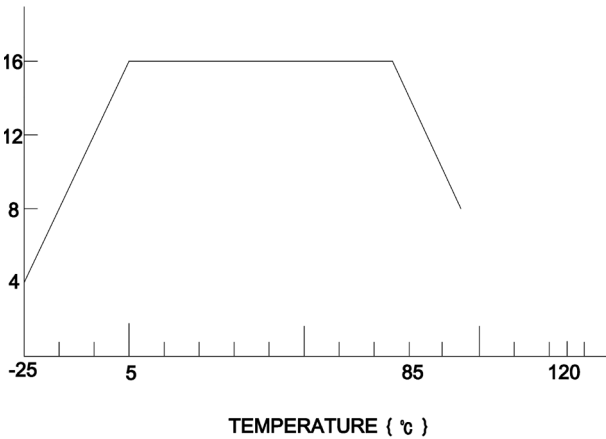


PTFE: PRESSURE/TEMPERATURE GRAPHS

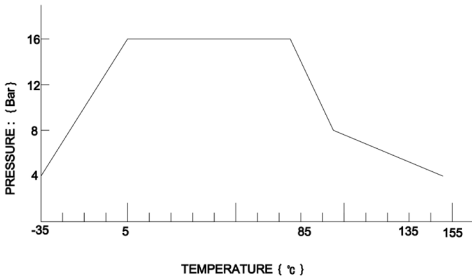

SILICON: PRESSURE/TEMPERATURE GRAPHS

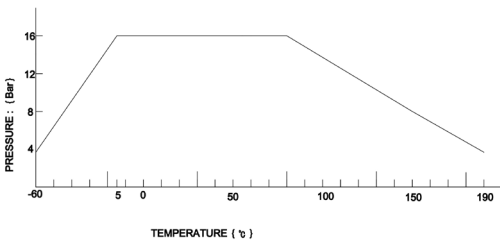

VITON: PRESSURE/TEMPERATURE GRAPHS

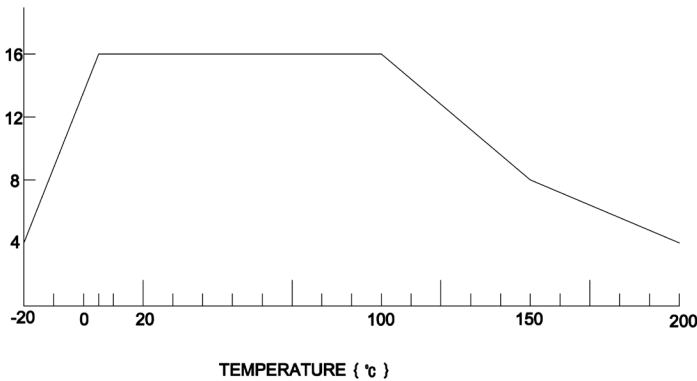

HUK Wafer Pattern Butterfly Valve

Size	DN	4 - ØM1	ØD4	PCD ØD2	PCD ØD3	ISO 5211	S
1.1/2"	40	10	90	50	70	F05/F07	11
2"	50	10	90	50	70	F05/F07	11
2.1/2"	65	10	90	50	70	F05/F07	11
3"	80	10	90	50	70	F05/F07	11
4"	100	10	90	-	70	F07	14
5"	125	10	90	-	70	F07	14
6"	150	12	90	-	70	F07	14
8"	200	12	125	-	102	F10	22
10"	250	12	125	-	102	F10	22
12"	300	12	125	-	102	F10	22
14"	350	12	125	-	102	F10	22
16"	400	18	175	-	140	F14	27
18"	450	18	175	-	140	F14	27
20"	500	18	175	-	140	F14	36
24"	600	22	210	-	210	F16	46

