

Professional Range Mark 2


Filter Regulator



Specification:


Type	FM2-20-01-W	FM2-30-02-C	FM2-40-03-C FM2-40-04-C	FM2-50-06-C FM2-50-10-C
Port size G	1/8" · 1/4"	1/4" · 3/8"	3/8" · 1/2"	3/4" · 1"
Gauge thread G	1/8"		1/4"	
Fluid	Air			
Operating pressure range MPa	0.15~0.85			
Max.Flow rate L/min	5000	1700	3000	5000
Ambient temperature ℃	-10~60			
Filter precision	Standard: 20 μm			
Cup material	Polycarbonate			
Guard cup	●	●	●	●

Notes 1:The guard cup of AW200A series can be optional. 2: The cups of AW200A,AW300A series can be optional.




Dimension (mm):


FM2-20-01-W

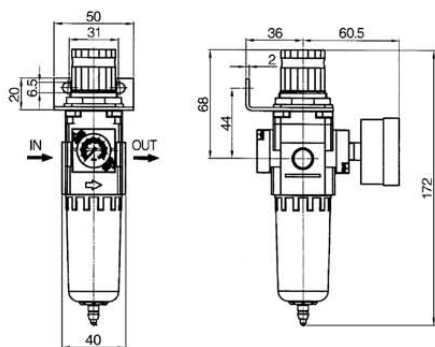

FM2-30-01-W

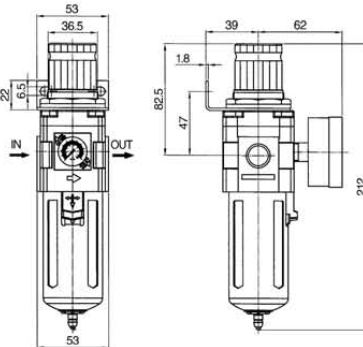

FM2-40-03-W & FM2-40-04-W

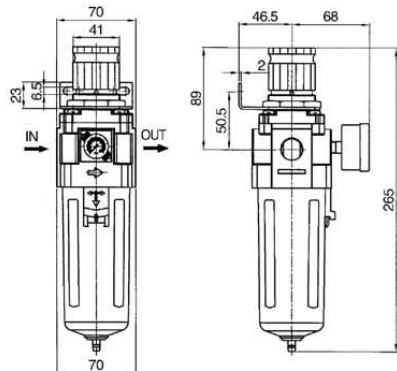

FM2-50-06-W & FM2-50-10-W

