



Crystal Clear Colour-tinted Polyether Polyurethane Tubing



Close Tolerance, Flexible, 25 & 100m Rolls				
Part Number	OD mm	ID mm	Min. Bend Radius (+20°C) mm	Length m
LE-1025U04R12	4	2.5	10	25
LE-1025U04R13	4	2.5	10	25
LE-1025U04R14	4	2.5	10	25
LE-1025U04R17	4	2.5	10	25
LE-1025U06R12	6	4	20	25
LE-1025U06R13	6	4	20	25
LE-1025U06R14	6	4	20	25
LE-1025U06R17	6	4	20	25
LE-1025U08R12	8	5.5	25	25
LE-1025U08R13	8	5.5	25	25
LE-1025U08R14	8	5.5	25	25
LE-1025U08R17	8	5.5	25	25
LE-1025U10R14	10	7	35	25
LE-1025U12R14	12	8	40	25
LE-1100U04R12	4	2.5	10	100
LE-1100U04R13	4	2.5	10	100
LE-1100U04R14	4	2.5	10	100
LE-1100U04R17	4	2.5	10	100
LE-1100U06R12	6	4	20	100
LE-1100U06R13	6	4	20	100
LE-1100U06R14	6	4	20	100
LE-1100U06R17	6	4	20	100
LE-1100U08R12	8	5.5	25	100
LE-1100U08R13	8	5.5	25	100
LE-1100U08R14	8	5.5	25	100
LE-1100U08R17	8	5.5	25	100
LE-1100U10R14	10	7	35	100
LE-1100U12R14	12	8	40	100

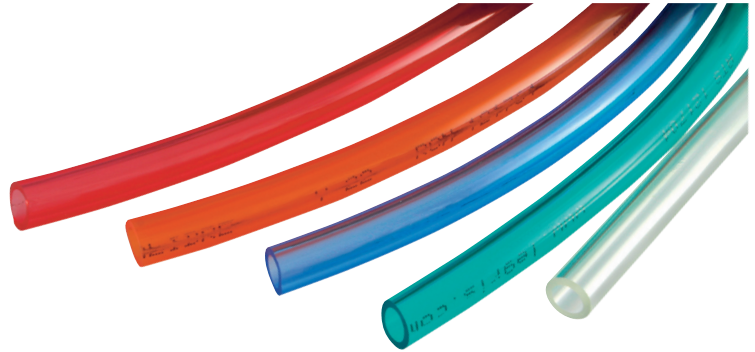

Pressure and temperature characteristics

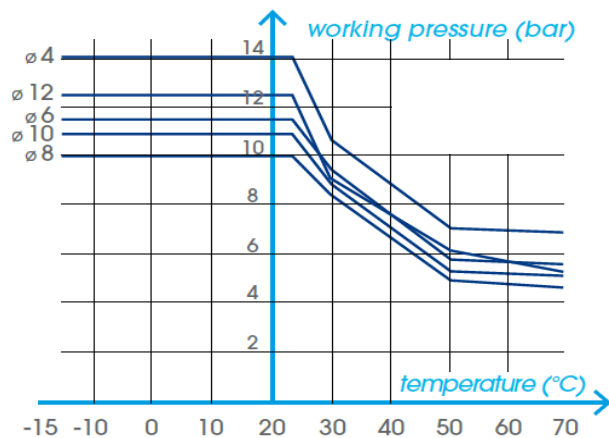

To calculate burst pressure, the values in the graph should be multiplied by 3.

Tolerances

Tube OD mm	Tolerances on OD
4	+/- 0.10
6	+/- 0.12
8-12	+/- 0.15