




Filter Regulator


Specification:

Type	DFR100-M5,01	DFR200-01,02,03	DFR400-03,04,06	DFR600-06,08
Port size G	M5 · 1/8 ”	1/8 ” · 1/4 ” · 3/8 ”	3/8 ” · 1/2 ” · 3/4 ”	3 / 4 ” · 1 ”
Gauge thread G	M5	1 / 8 ”	1/4 ”	
Fluid	Compressed Air			
Operating pressure range MPa	0.15~0.85	0.15~1.2		
Max.Flow rate L/min	500	1700	3500	11500
Ambient temperature °C	-10~60			
Filter precision	5μm or 40 μm			
Structure	Overflow type			
Guard cup	-	●	●	●

How to order:

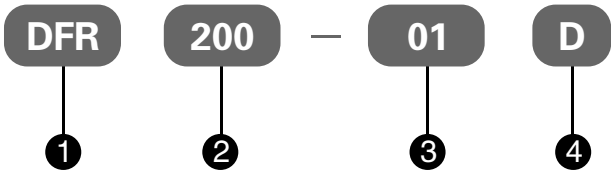


①	DFR Filter Regulator
②	Type: 100,200,400,600
③	Port size: M5,01:G1/8",02:G1/4",03:G3/8",04:G1/2",06:G3/4",08:G1"
④	□: Manual drain, D: Auto-drain;




Dimension(mm):

■ DFR100-M5、01

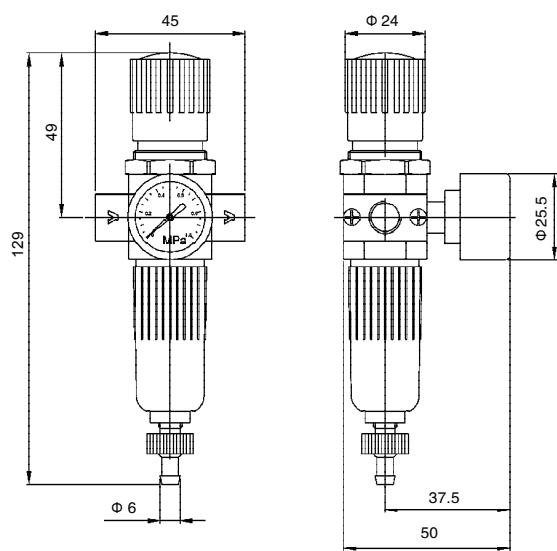


M5 is without connector

■ DFR200-01、02、03

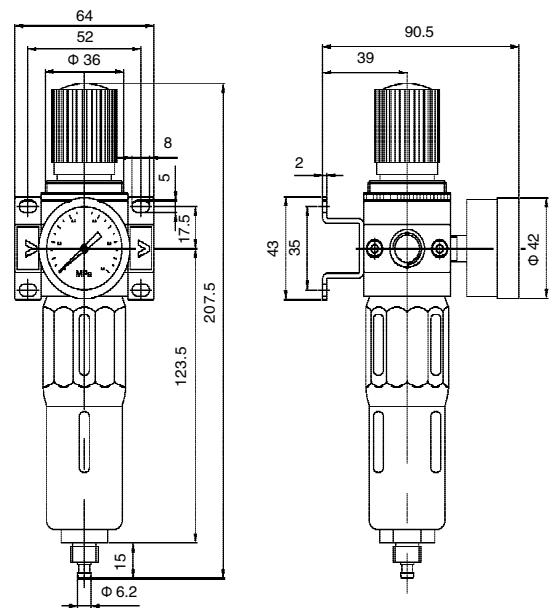

■ DFR400-03、04、06

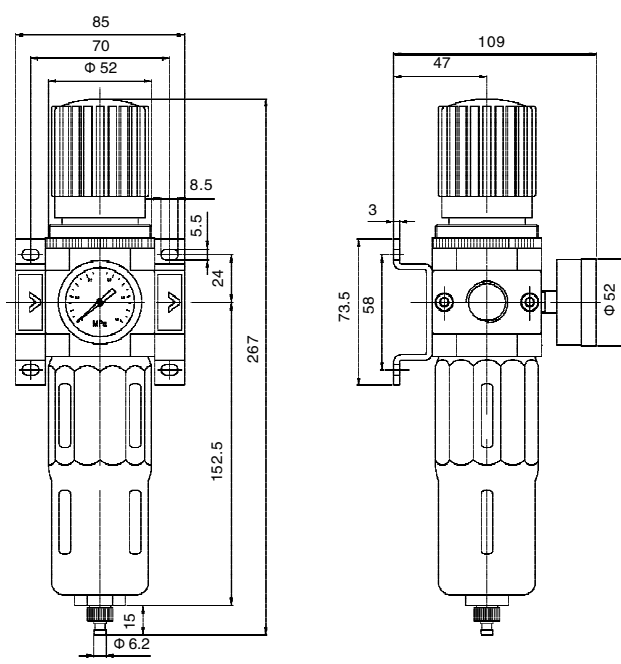

■ DFR600-06、08

