



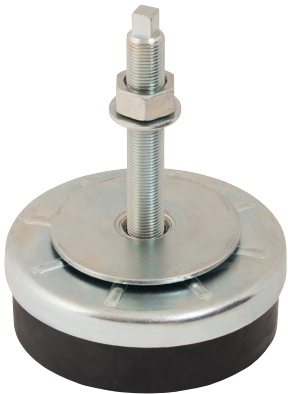

Levelling Feet, Anti Vibration

Material:
Plates: DC04 steel
Washers: DD12
Others: 11SMnPb37
Treatment: zinc plated
Thread: metric fine
Base: natural rubber 80IRHD



Item Number	Base Diameter (D) mm	Thread (M) mm	H (minim) mm	H (max.) mm	L (min.) mm	L (max.) mm	Compression Stiffness Rate kg/mm	Max. Operating Load kg	Max. Static Deflection mm
LFEET-8035	80	M12 x 1.25 pitch	35	46	87	98	255	510	2.0
LFEET-12040	120	M16 x 1.5 pitch	40	51	93	104	408	1,020	2.5
LFEET-16050	160	M20 x 1.5 pitch	50	63	125	138	918	2,039	2.2
LFEET-20060	200	M20 x 1.5 pitch	60	73	125	138	1,530	4,079	2.7