

High Pressure Non Return Valves

EHRVG-Series Steel Check Valves



Specification:

Body: Carbon Steel


Piston: Carbon Steel

Spring: C98 material

O-rings: NBR

Standard Cracking Pressure: 0.35bar-0.5bar

Surface Treatment: Cr3


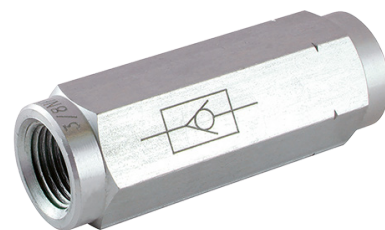


Applications:

One-way valve for in-line use.

Suitable for any type of hydraulic system using liquids that are not highly viscous. The standard types are in zinc plated carbon steel and especially suitable for non-corrosive mineral based oils and liquids.

PERFORMANCE

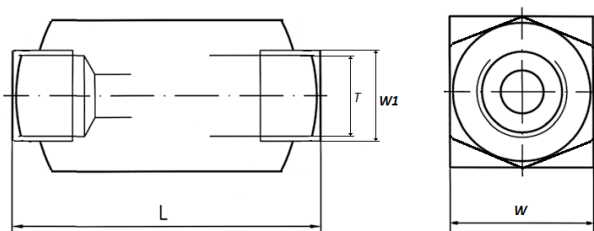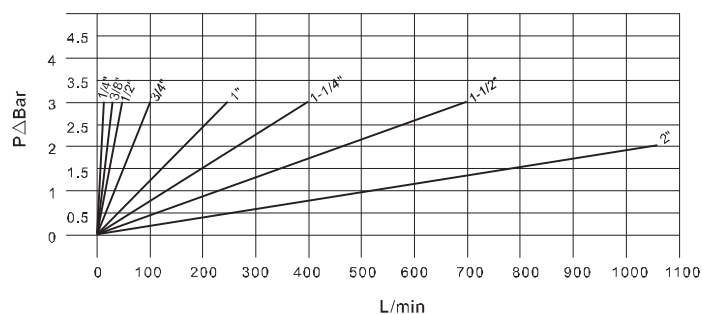

Part Code	DN (mm)	PN	L (mm)	W (mm)	W1 (mm)	T
EHRVG-14	6	700 bar	60	18.5	19	G1/4"
EHRVG-38	10	700 bar	70	23.5	24	G3/8"
EHRVG-12	13	500 bar	77	29.5	30	G1/2"
EHRVG-34	20	500 bar	90	35.5	36	G3/4"
EHRVG-1	25	500 bar	106	44.5	45	G1"
EHRVG-114	32	400 bar	125	54.5	55	G1.1/4"
EHRVG-112	38	320 bar	140	64.5	65	G1.1/2"
EHRVG-2	50	320 bar	160	74.5	75	G2"