


BV12 Brass Full Bore Ball Valve PN40 Rated

HUK
valves

Features Part

- Full Bore
- 40 Bar Rated
- Maximum Working Temperature -10°C to +90°C
- Flat Steel Lever
- Long Threads
- Wing Handle an option upto 1"

Part	Name	Material
1	Body	Nickel Plated Brass
2	End Cap	Nickel Plated Brass
3	Ball	Chrome Plated Ball
4	Ball Seal	PTFE
5	Stem	Brass
6	Stem Packing	PTFE
7	Gland Nut	Brass
8	Lever	Plated Steel
9	Nut	Plated Steel

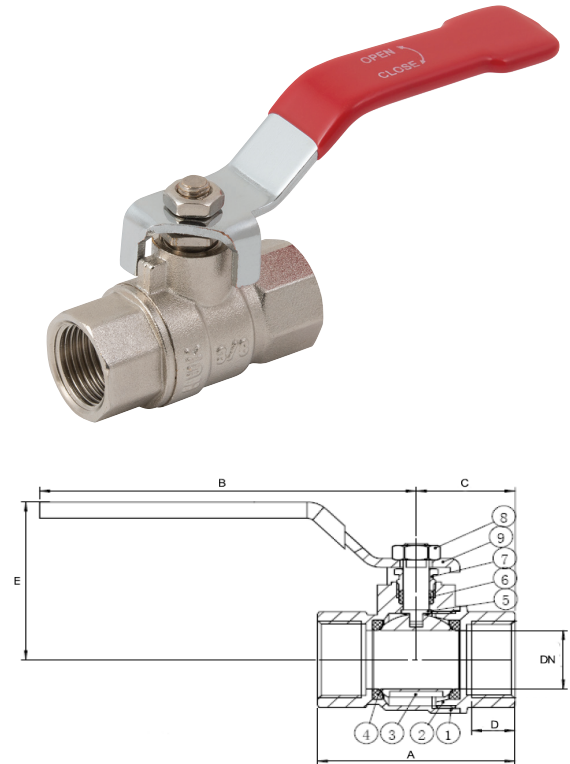

Part Code	Size	DN	A	B	C	D	D	Kgs
HMBV-14	1/4"	8	49	78.5	25.5	11.5	41.5	0.15
HMBV-38	3/8"	10	49	78.5	25.5	11.5	41.5	0.134
HMBV-12	1/2"	15	60	89	30	15	47	0.202
HMBV-34	3/4"	20	70	89	35	18	50	0.29
HMBV-1	1"	25	81	116	40.5	20	60.5	0.491
HMBV-114	1.1/4"	32	98	130	49	23	69	0.746
HMBV-112	1.1/2"	40	110	150	55	24.5	80	1.142
HMBV-2	2"	50	124	150	62	25.5	87.5	1.659
HMBV-212	2.1/2"	65	135.5	226.5	68	24	111.2	3.1
HMBV-3	3"	75	153	226.5	76.5	25	120	4.42
HMBV-4	4"	90	187	251.5	93.5	32	152.5	7.876