

Datasheet

Suction cup BL40-2 Silicone, 1/4" NPT male, with mesh filter

Article number: 0101536



- Suitable for level adjustment.
- Lifting movement to separate small and thin objects.
- Less suitable when the lifting force is parallel to the surface of the object.

Technical data

| Description | Unit | Value |
|-------------------------|-----------------|---------------------------|
| Suction cup shape | - | Multibellows |
| Application | - | Bag handling |
| Suction cup design | - | Round |
| Characteristics | - | Bag handling |
| Material | - | Silicone (SIL) |
| Weight, min. | g | 10 |
| Suction cup model | - | BL-2 |
| Volume | cm ³ | 27 |
| Height | mm | 57.4 |
| Outer diameter, min. | mm | 40 |
| Fitting size | - | 1/4" |
| Fitting option | - | Filter mesh |
| Fitting style | - | Male |
| Fitting type | - | NPT-thread |
| Suction cup model | - | BL40-2 reinforcement ring |
| Movement, vertical max. | mm | 27 |
| Suction cup model | - | BL40-2 |
| Movement, vertical max. | mm | 27 |
| Curve radius, min. | mm | 11 |

Performance - Lifting forces


| | Vertical (N) | Parallel (N) |
|---------------------------|--------------|--------------|
| BL40-2 reinforcement ring | | |
| 20 -kPa | 11 | |
| 60 -kPa | 22 | |
| BL40-2 | | |
| 20 -kPa | 11 | |
| 60 -kPa | 30 | |

| Material | |
|------------------------|---------------------------|
| Name | Silicone, SIL 50° Shore A |
| Colour | Red |
| Temperature, min. °C | -40 |
| Temperature max. °C | 200 |
| Hardness °Shore A | 50 |

Material resistance

| | |
|--------------------|-----------|
| Alcohol | Good |
| Concentrated acids | Poor |
| Ethanol | n/a |
| Hydrolysis | Fair |
| Methanol | n/a |
| Oil | Poor |
| Oxidation | Excellent |
| Petrol | Poor |
| Wear resistance | Good |
| Weather and ozone | Excellent |

Dimensional drawings

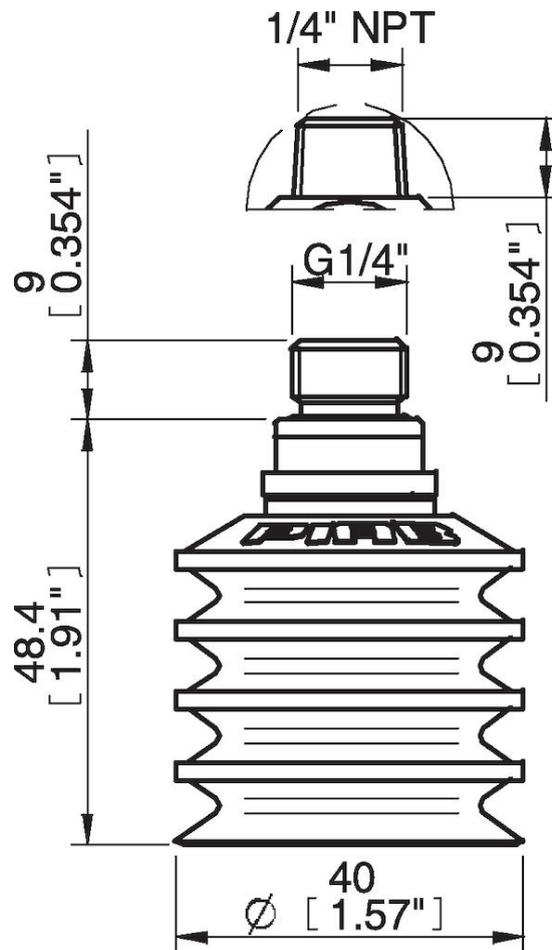

Values specified in this data sheet are tested at (unless otherwise stated):

- Room temperature (20°C [68°F] ± 3°C [5.5°F]).
- Standard atmosphere (101.3 [29.9 inHg] ± 1.0 kPa [0.3 inHg]).
- Relative humidity 20-70%.
- Compressed air quality, DIN ISO 8573-1 class 4.

Accessories

0100261 | Fitting 5x1/8" NPSF female, 30–40

0101119 | Suction cup BL40-2 Chloroprene

0101153 | Fitting 1/8" NPSF female, 30–40, with mesh filter

0200714 | Fitting G1/8" male, 40, with mesh filter

3150197 | Fitting 1/8" NPSF female, 30–40, PA

3250005 | Fitting 1/8" NPSF female, 30–40

3250086 | Fitting G3/8" male, 30–40, with mesh filter

3250089 | Fitting 3/8" NPT male, with mesh filter

3250091 | Fitting G1/4" male, 30–40, with mesh filter

3251006 | Fitting 1/8" NPSF female, 30–40, with dual flow control valve

3251007 | Fitting G1/4" male, 30–40, with mesh filter and dual flow control valve

3251008 | Fitting 1/4" NPT male, with dual flow control valve

3251009 | Fitting G3/8" male, 30–40, with mesh and dual flow control valve

3251010 | Fitting 3/8" NPT male, with dual flow control valve

3251011 | Fitting 5x1/8" NPSF female, 30–40, with dual flow control valve

3150073 | Strengthening ring set BL40, Set of 4

Spare parts

0101120 | Suction cup BL40-2 Silicone

3250093 | Fitting 1/4" NPT male, with mesh filter