

AIR PREPARATION ACCESSORIES 3/2 SHUT OFF VALVES




Specification


Model	KZ200-06	KZ200-08	KZ300-08	KZ300-10	KZ300-15	KZ400-10	KZ400-15
Fluid	Air						
Port	1/8"	1/4"	1/4"	3/8"	1/2"	3/8"	1/2"
Pressure Range	0.0 – 0.9 Mpa (0 – 130psi)						
Proof Pressure	1.5 MPa (215psi)						
Temperature	-20 to +70°C						
Actuation	Manual						
Exhaust Port	1/4"					1/2"	
Operational Angle	90°						
Valve Type	3/2						

Suitable to use with Series 200, 300, & 400 KELM™ Air Preparation units, additional fixing bracket will be required.

Symbol



Ordering Code

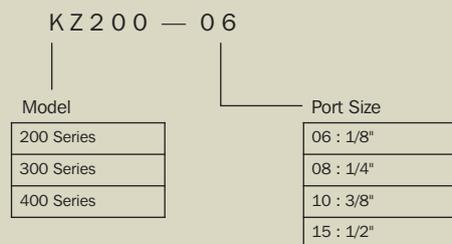

Product Features

Can be used as a stand alone 3/2 Manual Shut Off Valve.

The unit is lockable and it is fitted with a sturdy handle which also indicates to any operator what position the unit is in during any maintenance.


The Valve meets the OSHA standard (Occupational Safety & Health Administration).

When the Valve is locked in it's 'OFF' position any downstream air pressure is vented through the exhaust port.

To save the system being made active by a third party it is always advised to use a padlock to lock the valve into the 'OFF' position

Padlock and mounting bracket come supplied with the unit.


During Maintenance

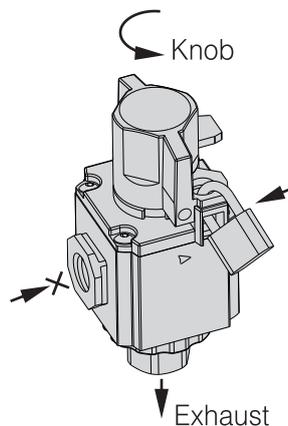

AIR PREPARATION ACCESSORIES 3/2 SHUT OFF VALVES

Dimensions

Model / Item	KZ200		KZ300			KZ400	
	6	8	8	10	15	10	15
A	42		55			65	
B	47		60			75	
C	30		41			50	
D	1/8"	1/4"	1/4"	3/8"	1/2"	3/8"	1/2"
E	40		53.4			64	
F	27		40			55	
G	8.5		8			11	
H	5.5		6.5			8.5	
I	23		27			33.5	
J	36.5		46			58.5	
K	89		112.5			134	
L	42.5		56.5			66	
R	1/4"		3/8"			1/2"	

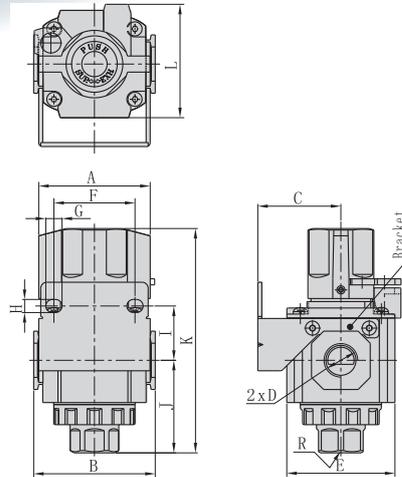

Inner Structure

No.	Item
1	Valve Cap
2	Body
3	Screw
4	Operating Screw
5	Adjusting Screw
6	Special Screw
7	Fixing Plate
8	O-ring
9	Cover
10	Spool
11	Plug
12	Spring
13	O-ring
14	Cover

